

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: White

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10 Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:10m Ohm Max





Insulator resistance:100M ohm min.


Withstanding Voltage:1800V AC/Minute

Ordering Information

A3501R-03S-01-X
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — A:In Bag
C:In Tray

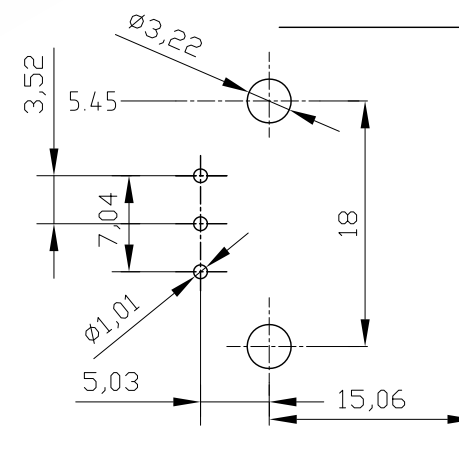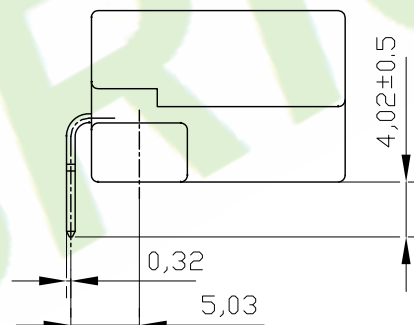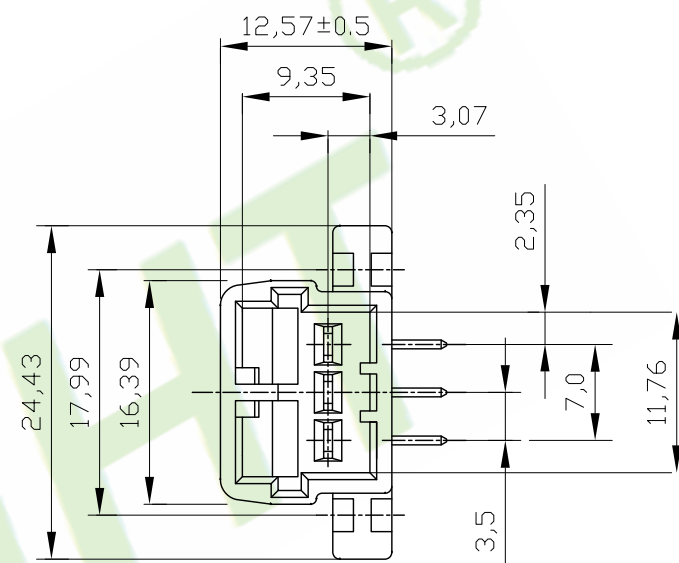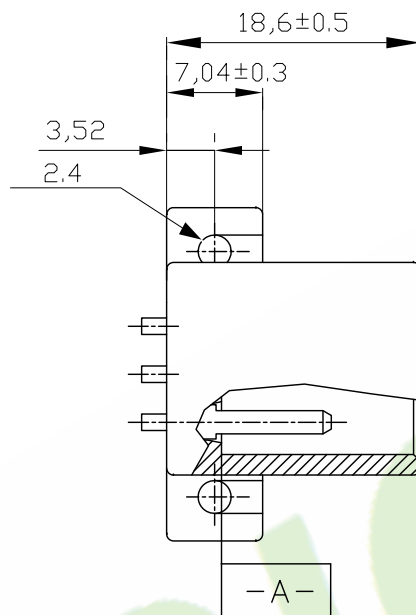

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A3501R-03S-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Samson	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.:	X': ±3.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X				Tony	X.X: ±0.30	X.X': ±1.0°	3.5mm Series Connector	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.20	X.XX': ±0.5°	DATE: 02-Oct-2014	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±			A4