

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Barss

Plated:See Ordering Information

Rating:

Current Rating:7.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1500V AC/Minute

Ordering Information

A3960AR-XXX150-X

1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions(02~20P)
4:— A:Gold Flash
Q:Tin Plated
5:— A:In Bag
B:In Tube
C:In Tray

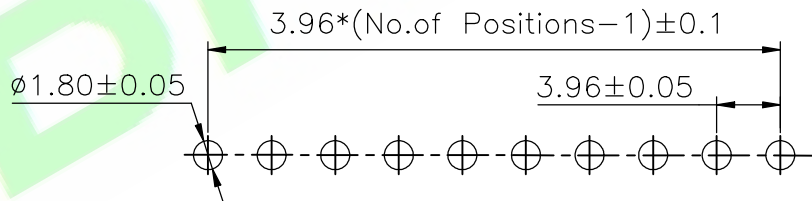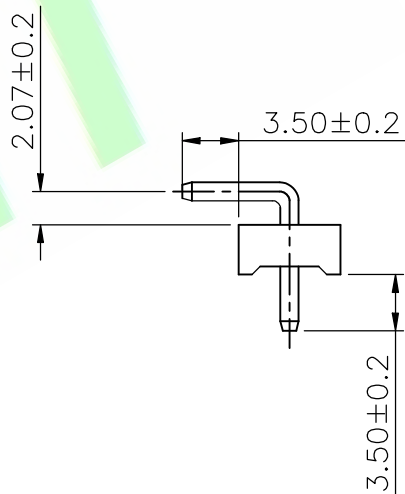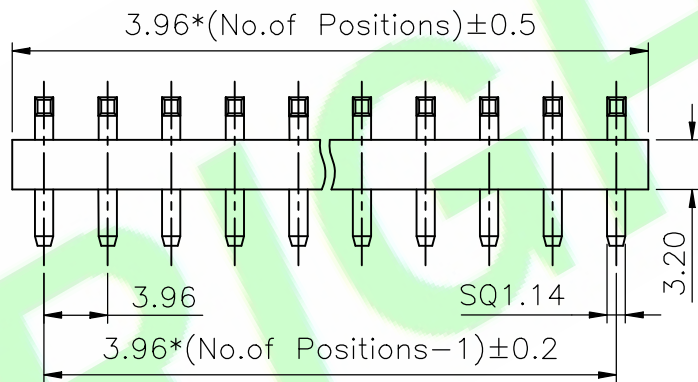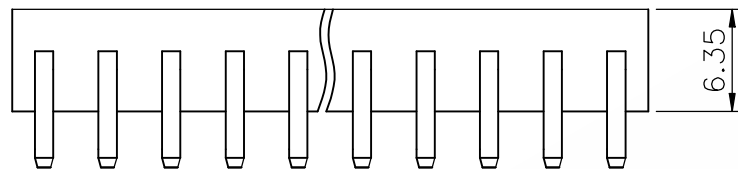

Recommended PCB Layout

DR.BY.:
JudyyanCHKD.:
Hu.chAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A3960AR-XXX150-X

DWG. NO.:

TITLE :

3.96mm Pitch Pin Header R/A Type


DATE: 7-May-2025

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.