

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Barss

Plated:See Ordering Information

Rating:

Current Rating:7.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25*~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A3960AR-XXX258-X

1 2 3 4 5

1:— Series No.

2:— R/R/A Type

3:— No. of Positions(02~20P)





4:— A:Gold Flash

Q:Tin Plated

5:— A:In Bag

B:In Tube

C:In Tray

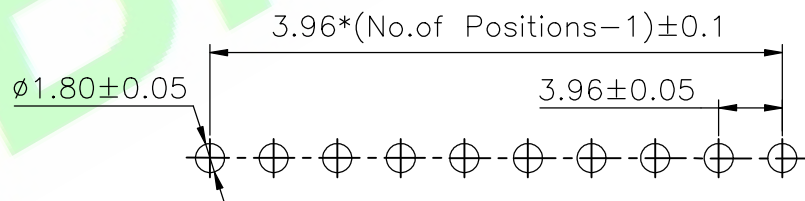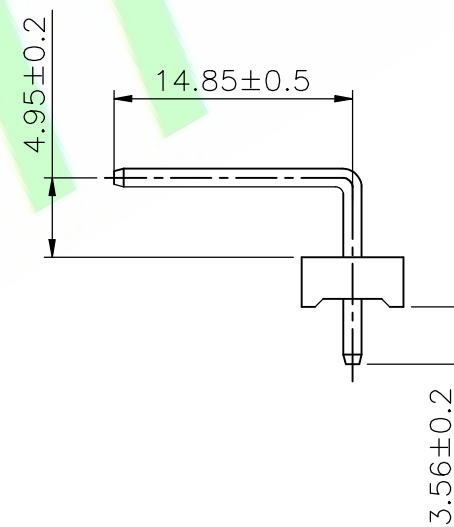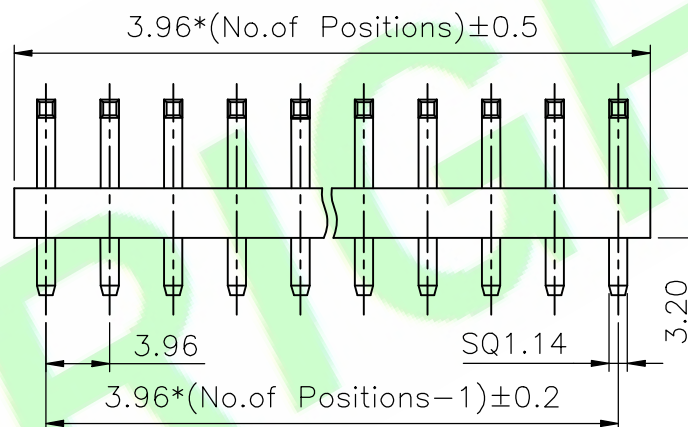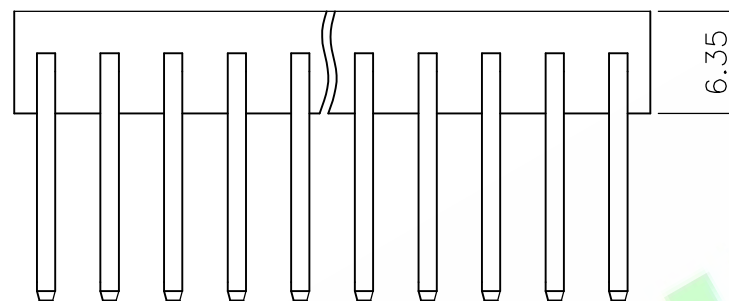

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A3960AR-XXX258-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X				Samson	LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Pin Header R/A Type	SHEET: 1/1			A4				
2X				Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1							
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm							
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°		DATE: 11-Dec-2016							
1		2		3		4		5		6		7		8	