

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:White
 Contact:Barss
 Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-25~+85°C

Electrical:





Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Ordering Information

A3960AS-XXXXXX-X

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions(02~20P)
- 4: — A:Gold Flash
Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray

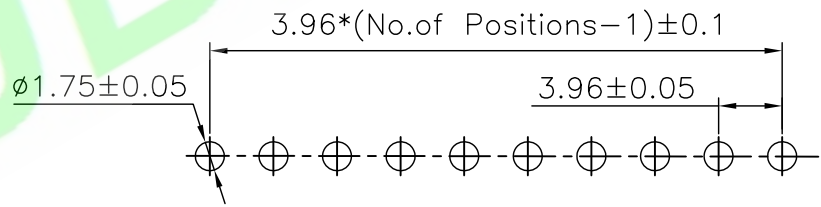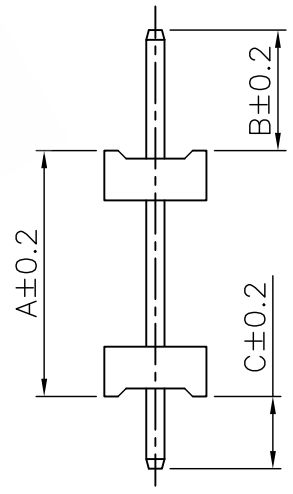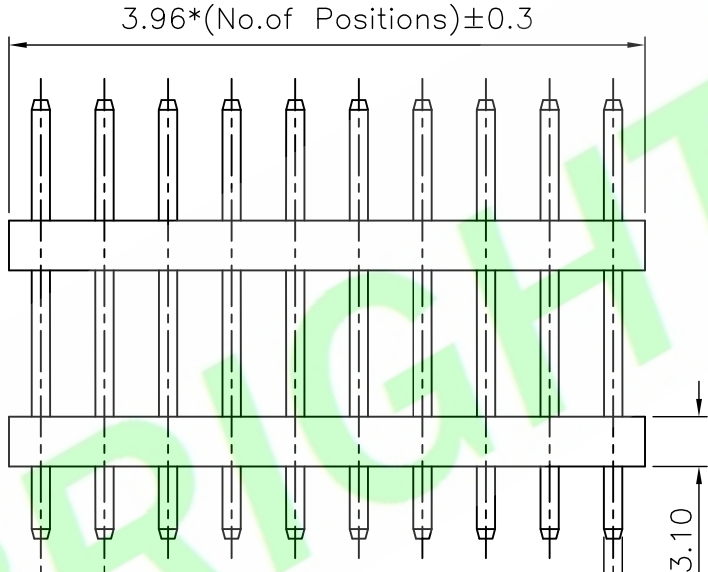

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A3960AS-XXXXXX-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :		
2X	ORIGINAL	Kenry			X.X: ±0.20	X.X': ±3.0°	3.96mm Pitch Pin Header R/A Type		
1X					X.XX: ±0.15	X.XX': ±2.0°	DATE: 11-Feb-2016		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm		SHEET: 1/1 SCALE: 1:1 THIRD ANGLE PROJECTION

A4