

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Natural

Rating:

Current Rating:10.0Amp(16AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering InformationA3961AS-XXX-01-A

1 2 3 4 5

- 1: — Series No.
2: — S:Starigh type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
5: — A:In Bag

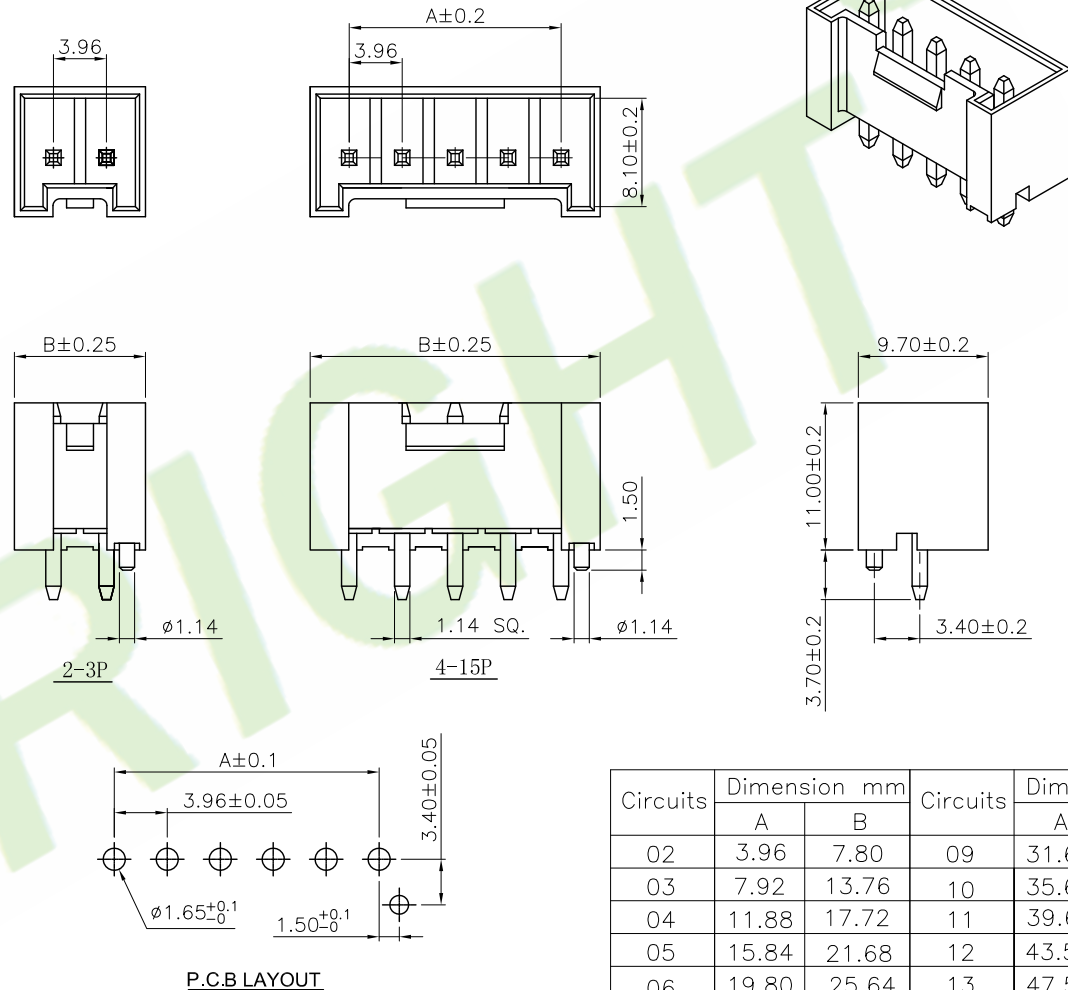

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	3.96	7.80	09	31.68	37.52
03	7.92	13.76	10	35.64	41.48
04	11.88	17.72	11	39.60	45.44
05	15.84	21.68	12	43.56	49.40
06	19.80	25.64	13	47.52	53.36
07	23.76	29.60	14	51.48	57.32
08	27.72	33.56	15	55.44	61.28

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A3961AS-XXX-01-A		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Kenry	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Wafer				
2X					x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 08-Jan-2016		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	UNIT: mm	THIRD ANGLE PROJECTION			