

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:7Amp(18AWG)/10Amp(16AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**A3961S-03X-01-V02-X**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray

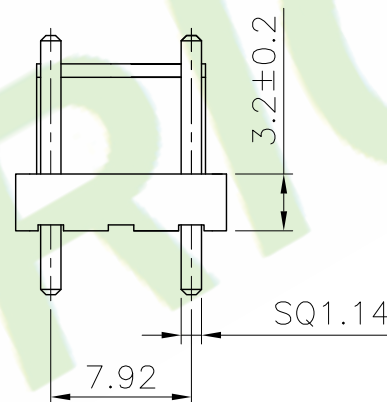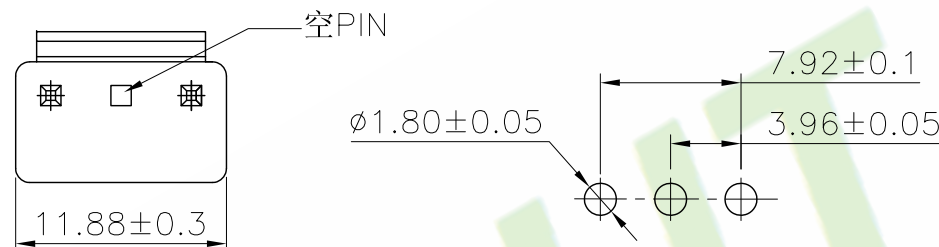

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A3961S-03X-01-V02-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE :		SHEET: 1/1		A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°	3.96mm Pitch Wafer Straight Type		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 26-Jun-2008		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					