

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:7A(AWG#18)/10A(AWG#16)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A3961S-12Q-01-AA-E5A

1 2 3 4 5 6 7

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — Q: Tin Plated





5: — A: A Type

6: — A: In Bag

B: In Tube

C: In Tray

7: — E5: Empty 2,4,6,8,10Pin

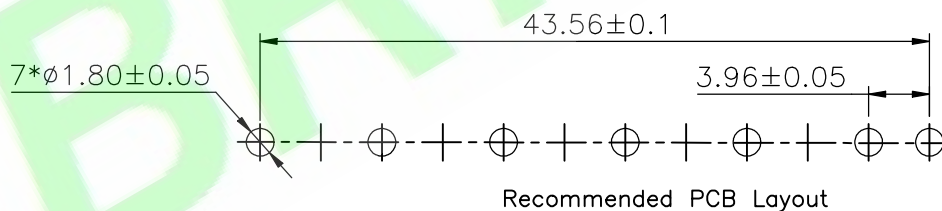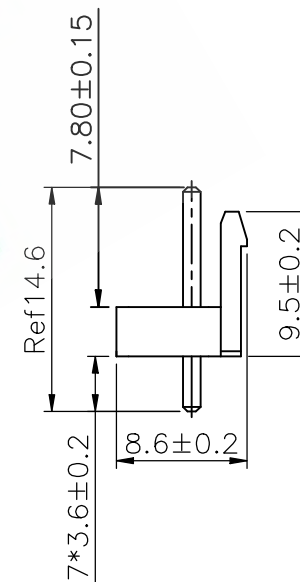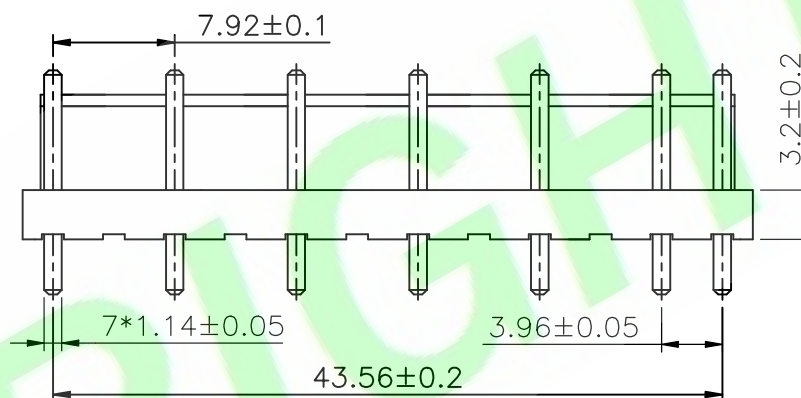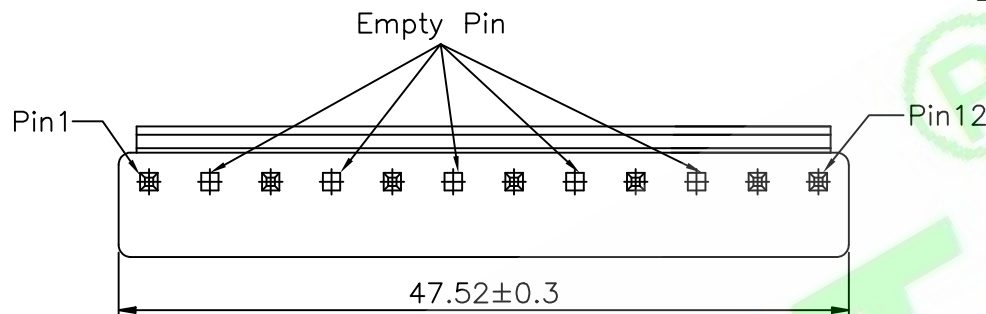

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : A3961S-12Q-01-AA-E5A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES	DWG. NO.:				
CHKD.: Juddyan	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Wafer Straight Type E5		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm		
	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 26-Sep-2024				

1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.