

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information

A3962R-XXX-01-A

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
S: Matte Tin Plated
5: — A: In Bag

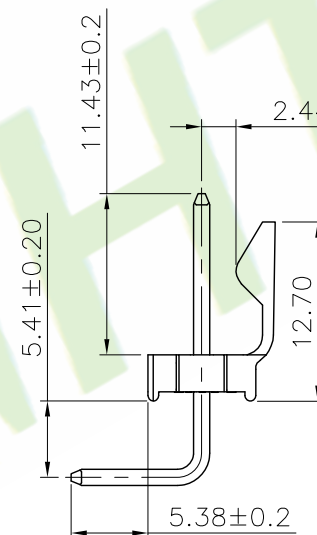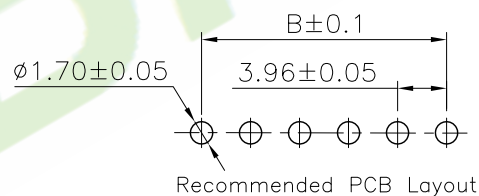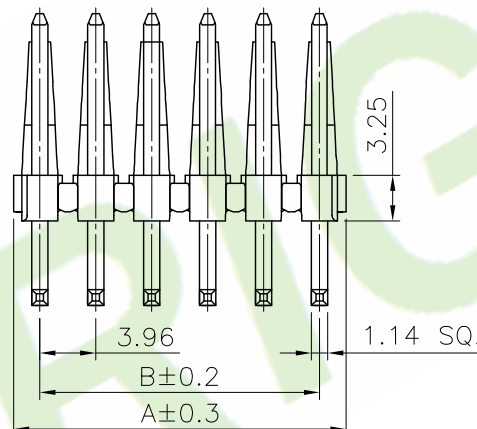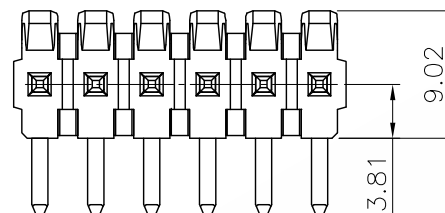

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : A3962R-XXX-01-A	
4X				Samson	LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	
2X	"Polyester" changed to "Nylon66+30%GF"	Jack	2016-01-27	Tony	X.X: ±0.20	X.X': ±3.0°	3.96mm Pitch Wafer R/A Type	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Jun-2008	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4