

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information**A3962SD-XXX-01-A**

1 23 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — D: Single row double plastic
4: — No. of Positions
5: — A: Gold Flash
Q: Tin Plated
S: Matte Tin Plated
6: — A: In Bag

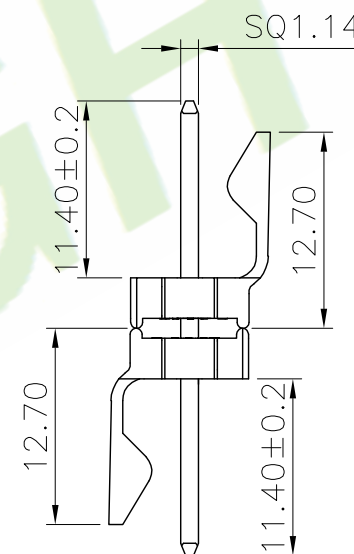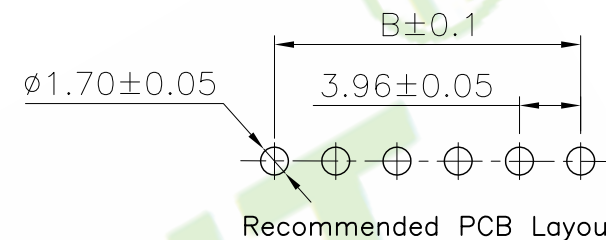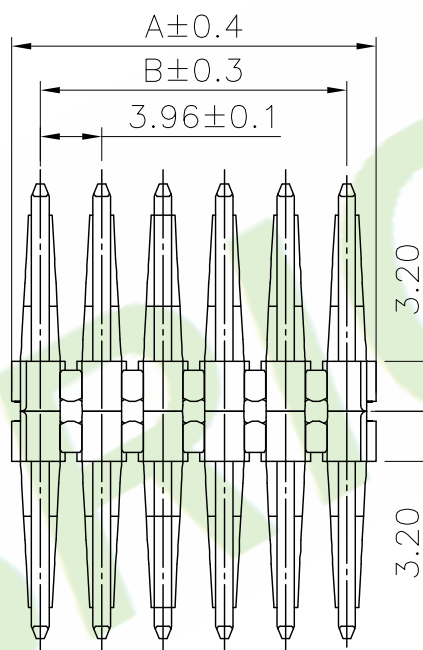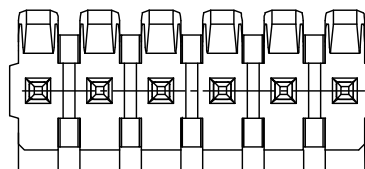

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A3962SD-XXX-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Wafer Straight Type Single row double plastic		SHEET: 1/1		A4
2X	Update code option	Judyyan	20230103	Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 26-Jun-2008				