

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:6.0 Amp(18AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute


Ordering Information**A3964R-XXX-02-A**

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
5: — A: In Bag

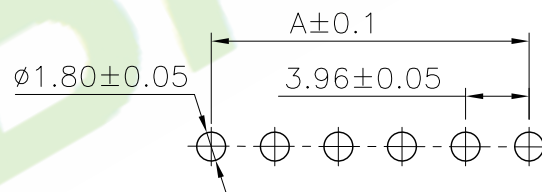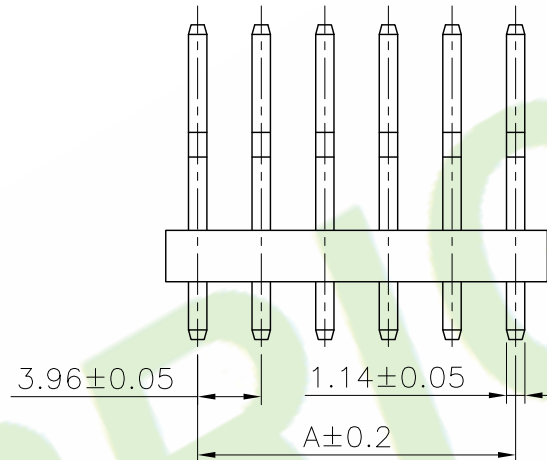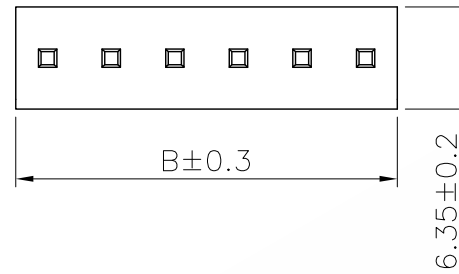

Recommended PCB Layout

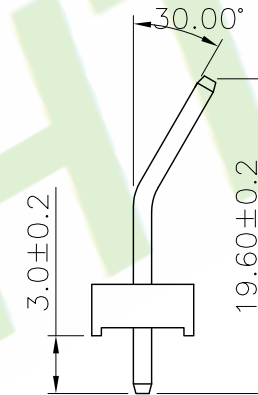

Circuits	Dimension mm	
	A	B
01	3.96	3.96
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60


5X				DR.BY:	GENERAL TOLERANCE:		PART NO : A3964R-XXX-02-A	
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0806-074	
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	
2X	Update code option	Judyyan	20221228	Tony	X.X: ±0.20	X.X': ±3.0°	3.96mm Pitch Wafer R/A Type	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Jun-2008	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4