



(Matte tin 60u"Min,Over 50u"Min,Nickel Overall)

Operating Temperature Range: $-40^{\circ}\sim+80^{\circ}\text{C}$

Withstanding Voltage:1000V AC/Minute

1	2	3	4	5
---	---	---	---	---

5:— A:In Bag

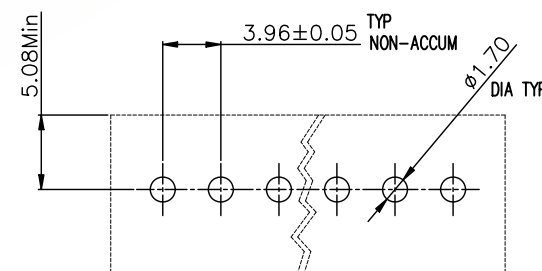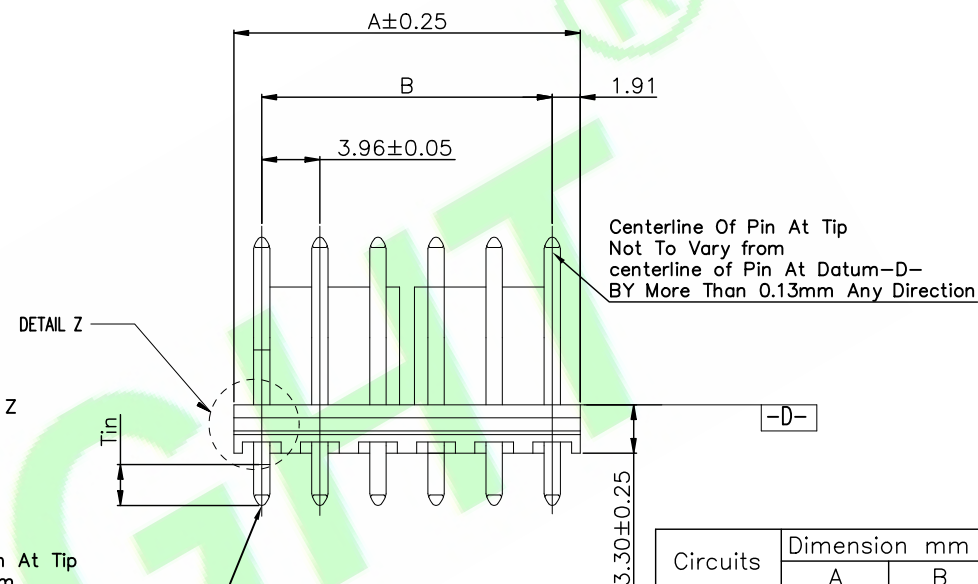

PCB Layout:Component side
Recommended PCB Thickness 1.57


	Circuits	Dimension mm	
		A	B
	02	7.77	3.96
	03	11.73	7.92
	04	15.70	11.89
	05	19.66	15.85
	06	23.62	19.81
	07	27.58	23.77
P	08	31.55	27.74
	09	35.51	31.70
	10	39.47	35.66
	11	43.43	39.62
	12	47.40	43.59
	13	51.36	47.55
	14	55.32	51.51
	15	59.28	55.47
	16	63.25	59.44
	17	67.21	63.40
	18	71.17	67.36

5X				DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A3968S-XXS-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :	SHEET: 1/1				
2X					x.x: ±0.25	x.x': ±3.0°	3.96mm Pitch Wafer Straight Type	SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 15-Mar-2022	UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°						

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4