

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10Amp(16AWG)

Voltage Rating:250V AC/DC





Operating Temperature Range:-40°C~+125°C

Electrical:



Contact resistance:10m Ohm Max.

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

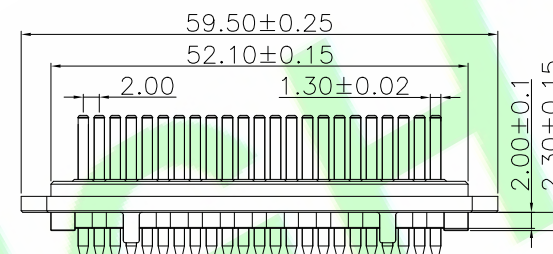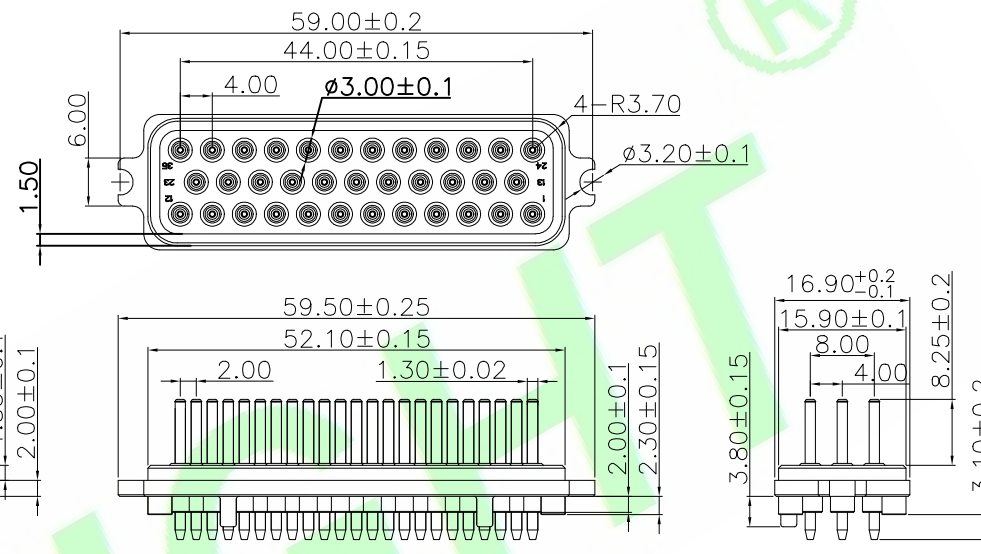

SCALE A 3:1

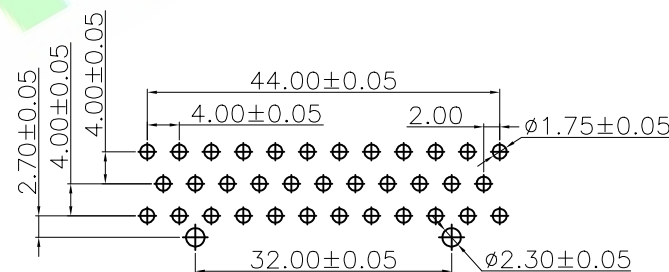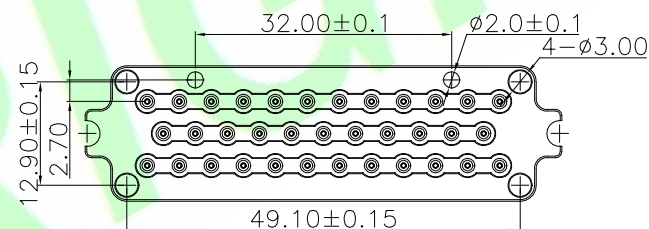

Recommended PCB Layout

Ordering Information

A400005SA-35X-02-X

1 2 3 4 5

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

H: Selective Gold Flash

Q: Tin Plated

S: Matte Tin Plated

5:— A: In bag

B: In Tube

C: In Tray


4X	Update code option	Judyyan	20241217
3X	Insulator material from PA46 to PA6T	Anne	20241122
2X	Update code option	DENG	20230410
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY:	Samson
CHKD:	Tony
APPD:	Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
x.: ±0.30	x': ±5.0°
x.x: ±0.20	x.x': ±3.0°
x.xx: ±0.15	x.xx': ±2.0°
x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : A400005SA-35X-02-X
DWG. NO.:
TITLE : 4.0mm Pitch Header Assembly DIP Type
DATE: 19-Jan-2015

HJBRIGHT [®] 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		