

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:5.0Amp(20AWG)

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**A40350R-06S-01-X**

1 2 3 4 5

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — A:Gold Flash

S:Matte Tin Plated






Y:30u" Gold on contact;

Matte Tin on tail



5: — C:In Tray

B:In Tube

G:Tape&Reel

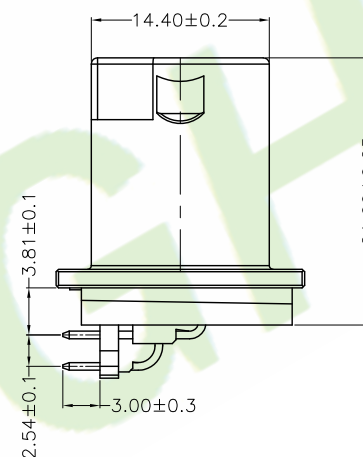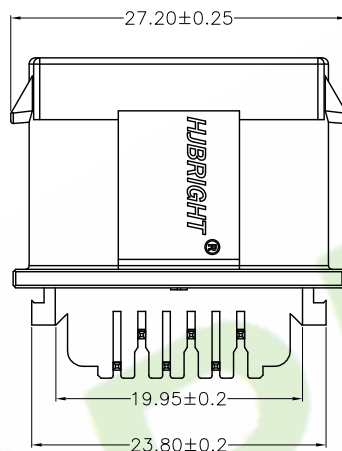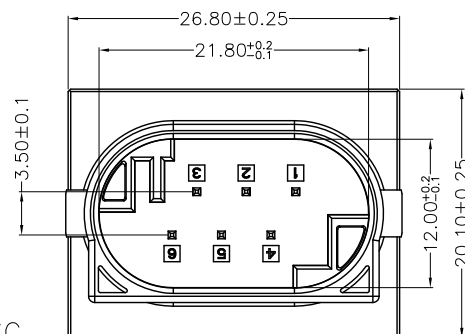

PCB Layout



5X			
4X			
3X			
2X	Update Code options	Judyyan	20221125
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A40350R-06S-01-X

DWG. NO.: A40R06

TITLE :

4.0*3.5mm Pitch Wafer MQS

DATE: 24-Sep-2021

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4