

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:

4.0 Amp For 1.5mm contact

10.0 Amp For 2.8mm contact

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:

10m Ohm Max For 1.5mm contact

5m Ohm Max For 2.8mm contact

Ordering Information

A41001R-20S-01-C






1: Series No.

2: R:R/A Type

3: No. of Positions

4: S:Matte Tin Plated

5: C:In Tray

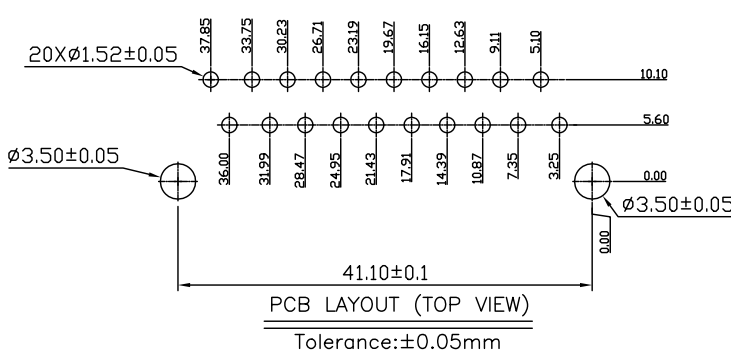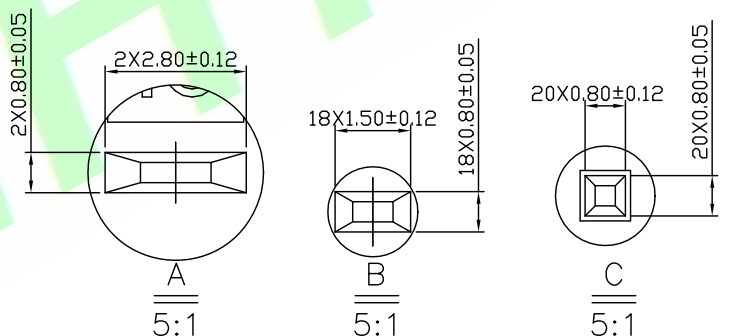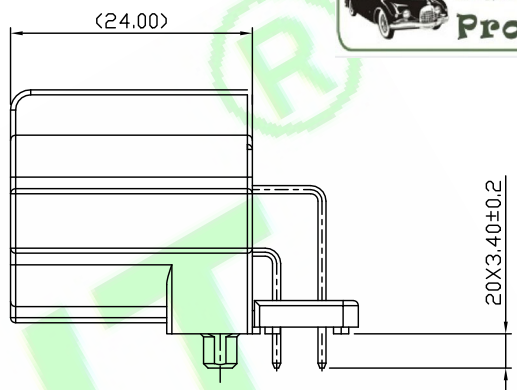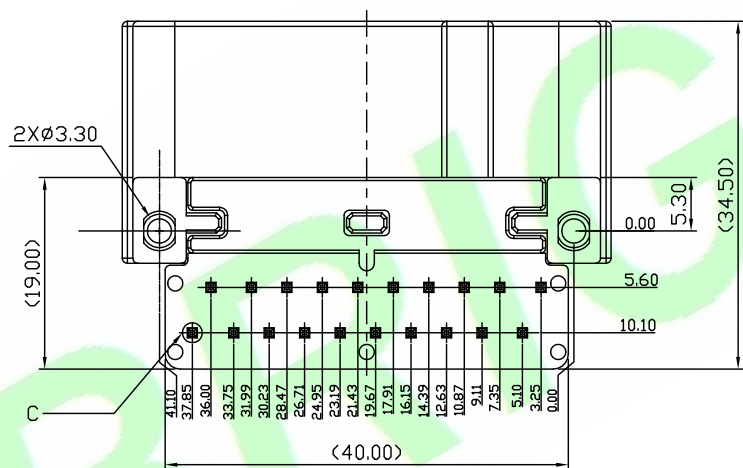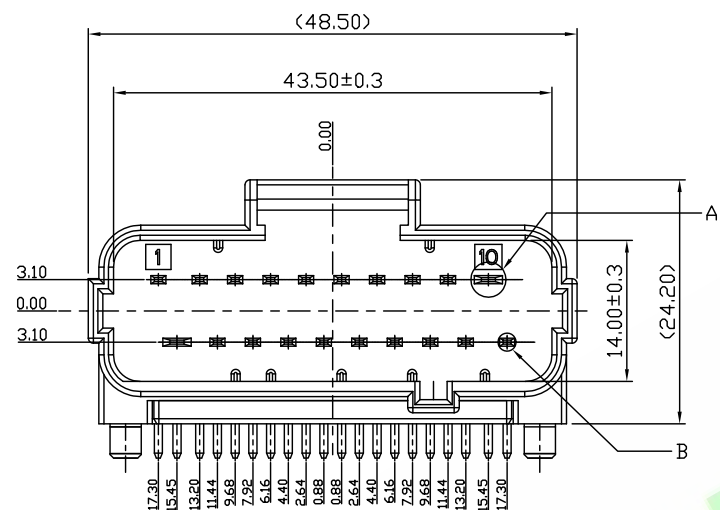

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : A41001R-20S-01-C		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X						LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.: Hu.CH	X.:	X': ±5.0'	TITLE : 20PIN Double Row 4.0 Pitch R/A Header		SHEET: 1/1			A4		
2X					X.X: ±0.40	X.X': ±3.0'			SCALE: 1:1					
1X	ORIGINAL	Zolin		APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0'	DATE: 27-May-2025		UNIT: mm				THIRD ANGLE PROJECTION	
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0'								