

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-2 Color:White
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:7.0 Amp
 Voltage Rating:600V AC/DC
 Operating Temperature Range:-25~+85°C






Electrical:

Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Ordering Information

A42011AR-XXX-01-X
 1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray

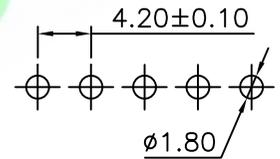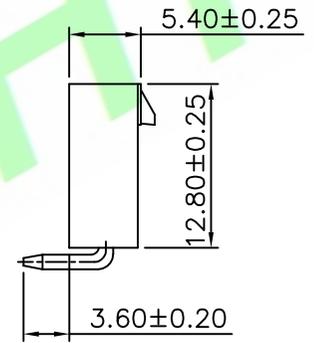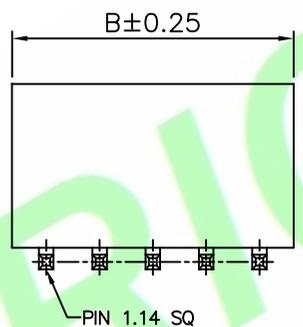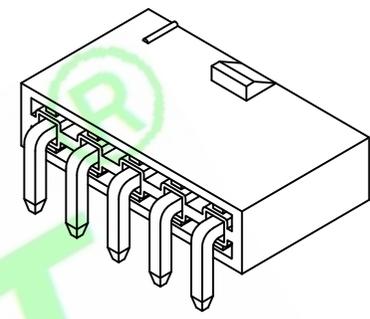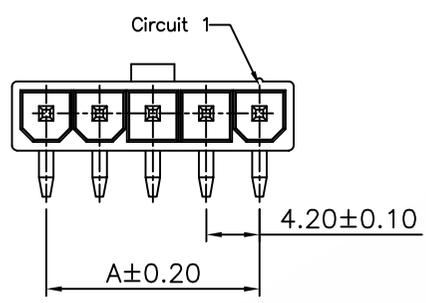

Recommended PCB Layout

Circuits	Dimension mm	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

5X			
4X			
3X			
2X			
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Kenry	
CHKD.:	Tony	
APPD.:	Billy	

GENERAL TOLERANCE:		PART NO : A42011AR-XXX-01-X
LINEAR	ANGLES	DWG. NO.:
X.: ±0.30	X': ±5.0°	TITLE :
X.X: ±0.20	X.X': ±3.0°	4.2mm Pitch Wafer Straight Type
X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Jun-2008
X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGEE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4