

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:White

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:9.0 Amp

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

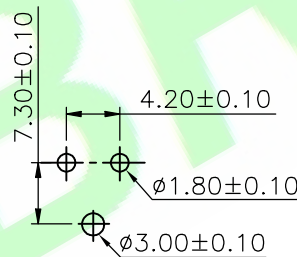
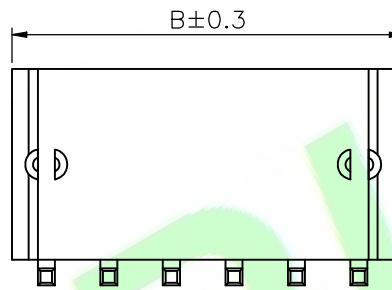
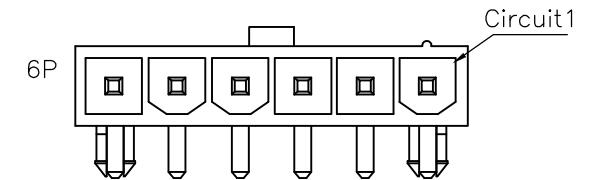
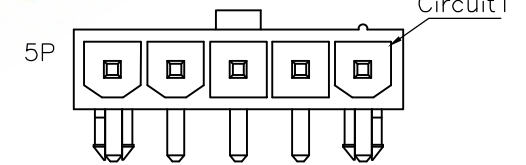
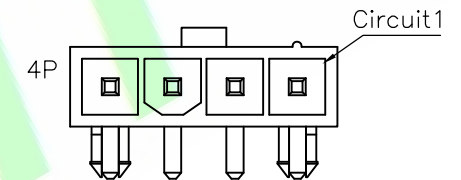
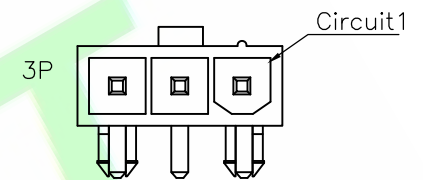


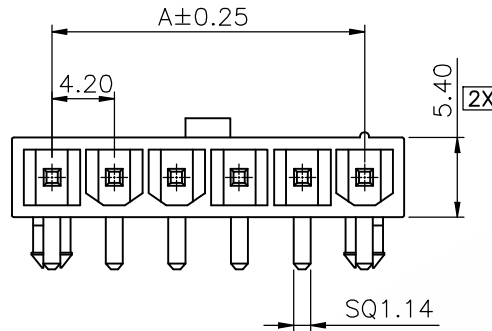
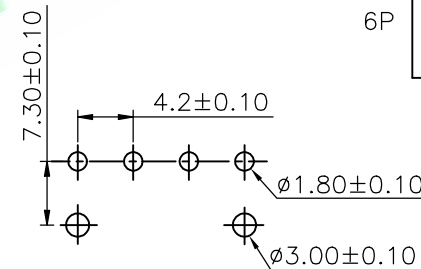
Withstanding Voltage:1500V AC/Minute

Ordering Information

A42011AR-XXX-03-X

1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
S:Matte Tin Plated
5:— A:In Bag
B:In Tube
C:In Tray

2P
PCB Layout3P-6P
PCB Layout

Circuits	Dimension mm	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

DR.BY.:
BruceCHKD.:
TonyAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X: ±2.0°

X.X: ±0.30 X.X: ±2.0°

X.XX: ±0.20 X.XX: ±2.0°

X.XXX: ±0.10 X.XXX: ±2.0°

PART NO : A42011AR-XXX-03-X

DWG. NO.:

TITLE :

4.2mm Pitch Wafer R/A Type

DATE: 26-Jun-2008

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Add 5.4-inch size.	Judyann	20250801
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.