





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:1500V AC/Minute

1	2	3	4	5
---	---	---	---	---

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
Q: Tin Plated
5:— A: In Bag
B: In Tube
C: In Tray

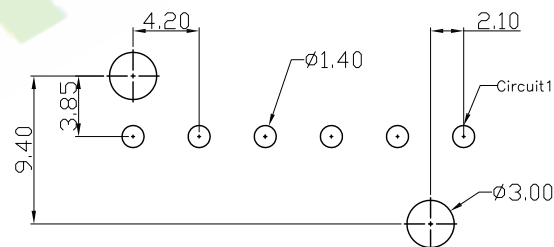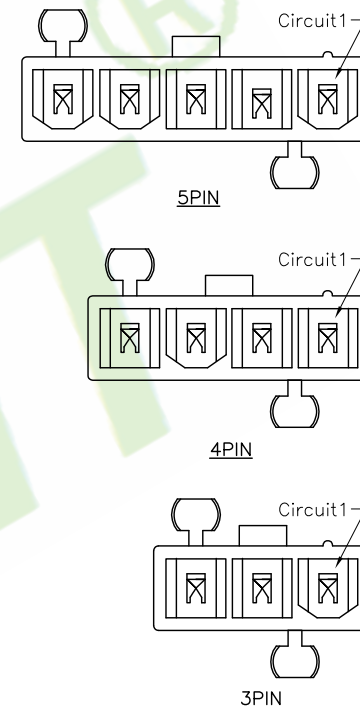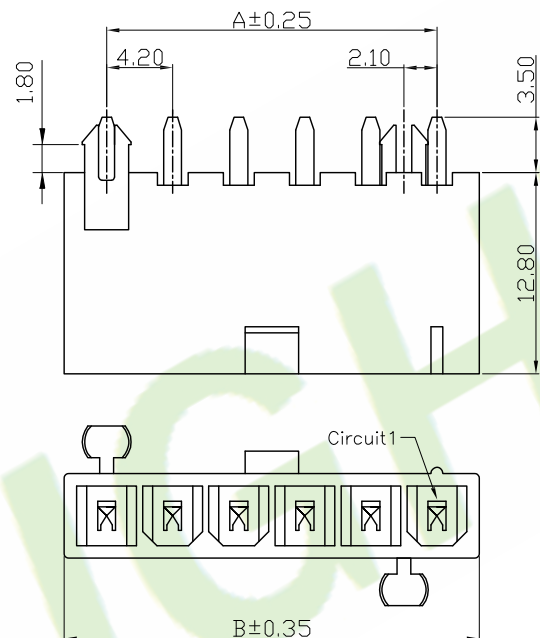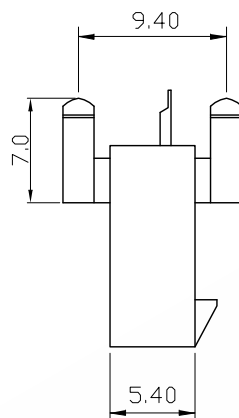

P.C.B. LAYOUT

5X			DR.BY.:	Mark	GENERAL TOLERANCE:		PART NO : A42011S-XXX-02-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X			CHKD.:	Ren	x.: ±0.30	x': ±5.0°	TITLE : 4.2mm Pitch 180° Single Row Wafer(With Pegs)	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Mark	APPD.:	x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 26-Jun-2008	THIRD ANGLE PROJECTION		