





Specifications:  
 Material And Finish:  
 Insulator:Nylon 66  
 Contact:Brass  
 Plated:See Ordering information

Rating:  
 Current Rating:9.0 Amp  
 Voltage Rating:600V AC/DC  
 Operating Temperature Range:-25~+85°C

Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:1500V AC/Minute  
 UL:E357750

Ordering Information  
 A4201S-XXX-01-XXX  
 1 2 3 4 5 6 7

- 1:— Series No.
- 2:— S: Straight Type
- 3:— No. of Positions
- 4:— Q: Tin Plated  
S: Matte Tin Plated
- 5:— A: PA66 V0  
B: PA66 V2
- 6:— B: Black  
N: Natural
- 7:— A: In Type

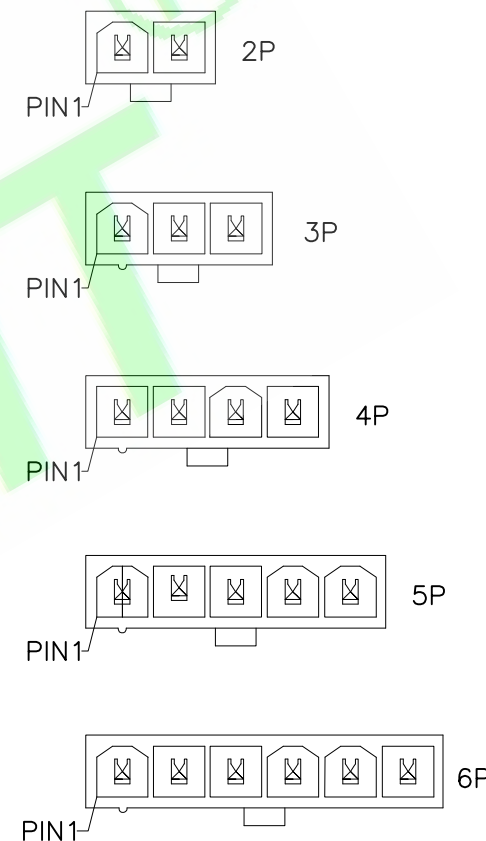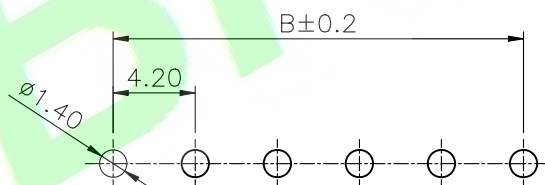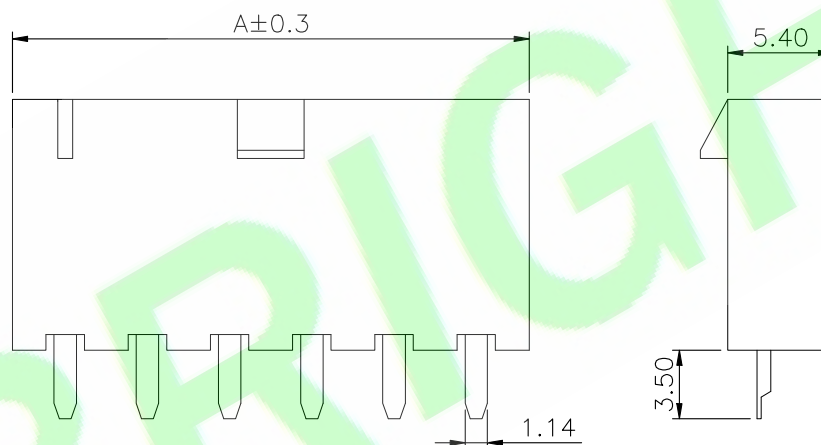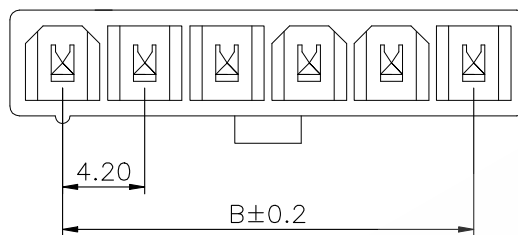

No.	Dimensions	
	A	B
02	9.60	4.20
03	13.80	8.40
04	18.00	12.60
05	22.20	16.80
06	26.40	21.00

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A4201S-XXX-01-XXX
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.40	X: ±5.0°	TITLE :
	X.X: ±0.30	X.X: ±3.0°	4.2mm Pitch Wafer Connector
	X.XX: ±0.20	X.XX: ±2.0°	DATE: 30-Apr-2024
	X.XXX: ±0.10	X.XXX: ±1.0°	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2  
 SCALE: 1:1  
 UNIT: mm



THIRD ANGLE PROJECTION

**A4**

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.