

Specifications:**Material And Finish:**

Insulator:Nylon 66 UL94V-2 Color:Translucence

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:7.0 Amp(18AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**A5081AS-XXX-02-X**


1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray

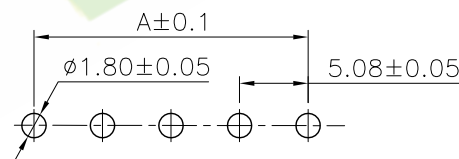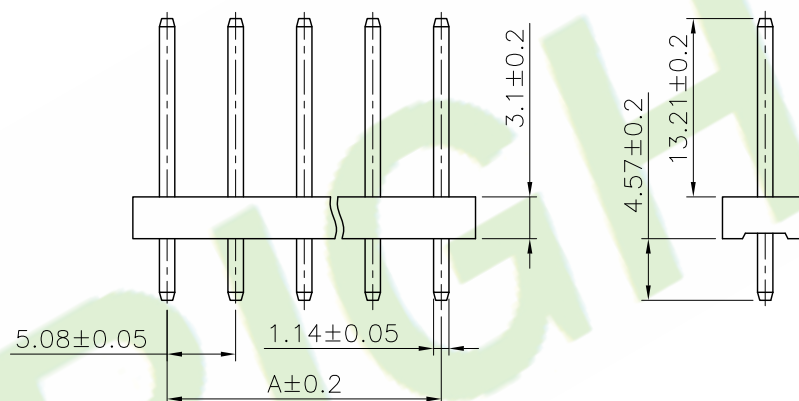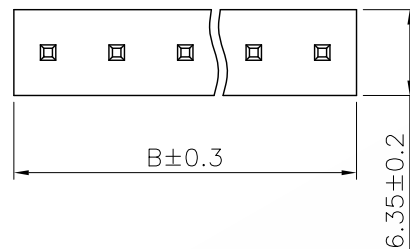

Recommended PCB Layout

Circuits	Dimension mm	
	A	B
02	5.08	10.22
03	10.16	15.30
04	15.24	20.38
05	20.32	25.46
06	25.40	30.54
07	30.48	35.62
08	35.56	40.70
09	40.64	45.78
10	45.72	50.86
11	50.80	55.94
12	55.88	61.02

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A5081AS-XXX-02-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0908-006					
3X				CHKD.:	x.: ±0.30	x*: ±5.0°	TITLE : 5.08mm Pitch Wafer Straight Type		SHEET: 1/1			A4
2X				Tony	x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 15-Aug-2009		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx*: ±1.0°						