


Specifications:
Material And Finish:
Insulator:Nylon 66+15GF% UL94V-0
Color:See Ordering Information
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:4.0 Amp
Voltage Rating:320V AC/DC
Operating Temperature
Range:-30~+85°C

Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
A5082S - XXS - 01 - XX
 1 2 3 4 5 6

- 1:— Series No.
2:— S:Straight Type
3:— No. of pins
4:— S:Matte Tin Plated
5:— B:Black
GR:Grey
R:Red
6:— A:In Bag
B:In Tube
C:In Tray
G:Tape&Reel

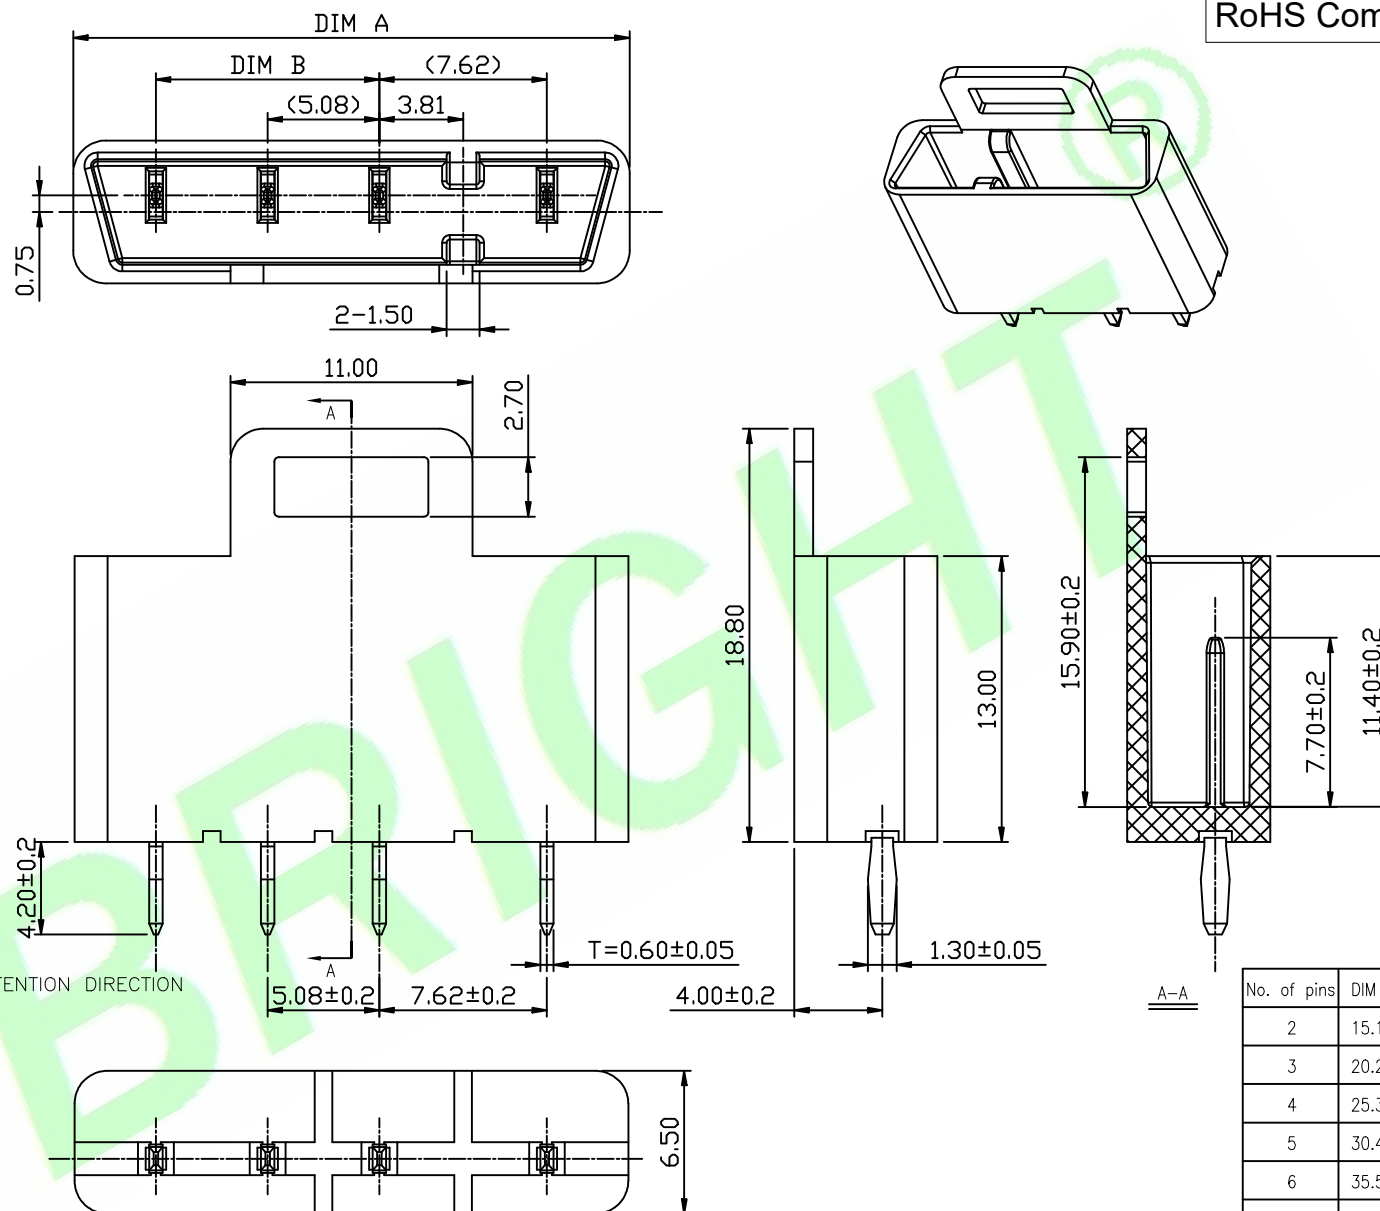

No. of pins	DIM A	DIM B
2	15.1	
3	20.2	5.08
4	25.3	10.16
5	30.4	15.24
6	35.5	20.36
7	40.5	25.40
8	45.6	30.48


DR.BY.:	GENERAL TOLERANCE:		PART NO : A5082S-XXS-01-XX
Hu.CH	LINEAR	ANGLES	
CHKD.:	x.:	x°: ±5.0°	DWG. NO.: 5.08PITCH WAFER
Hu.CH	x.x: ±0.40	x.x°: ±3.0°	
APPD.:	x.xx: ±0.25	x.xx°: ±2.0°	
Billy	x.xxx: ±0.15	x.xxx°: ±1.0°	DATE: 13-Mar-2024

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1 / 1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.