RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:20Amp AC/DC(2Circuits/AWG#12)
Voltage Rating:600V AC,DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:2000V AC/Minute

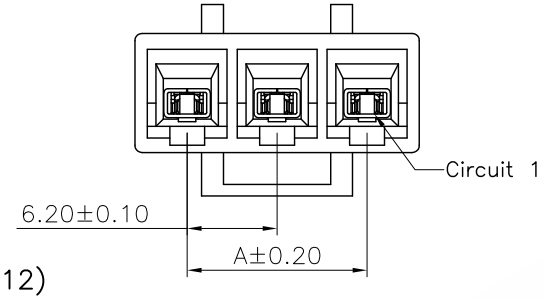



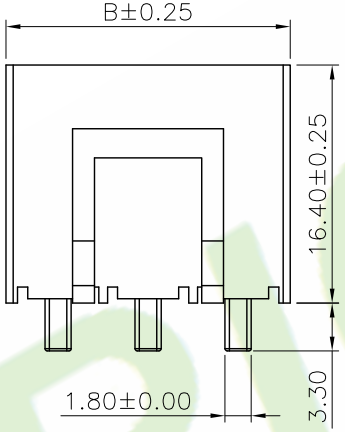

3P~4P

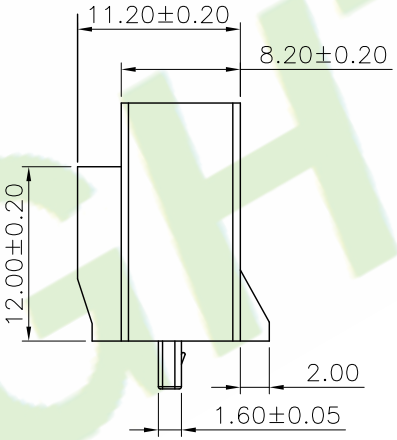



2P

Ordering Information
A6201S-XXQ-01-X
1 2 3 4 5

1: —— Series No.
2: —— S:Straight
3: —— No. of Positions
4: —— Q:Tin Plated
5: —— A:In bag
B:In Tube
C:In Tray

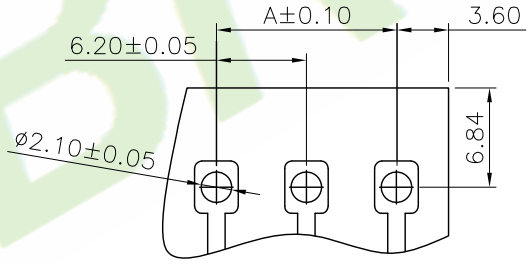

PCB LAYOUT

Poles	Dimensions	
	A	B
02	6.20	13.40
03	12.40	19.60
04	18.60	25.80

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X	Update code options	Judyyan	20220813
1X	ORIGINAL	Bruce	

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X.:	±0.30	X°:	±5.0°
X.X:	±0.20	X.X°:	±3.0°
X.XX:	±0.15	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : A6201S-XXQ-01-X
DWG. NO.:
TITLE : 6.20mm Pitch Wafer Straight Type
DATE: 04-Jun-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT