

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0,Color:Natural

Contact:Phosphor bronze

Plated:See Ordering Information

Rating:

Current Rating:13.5 Amp Max(12AWG)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:3.5m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2900V AC/Minute

Ordering Informat**A6351R-XXX-02-X**

1 2 3 4 5

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash

Q:Tin Plated

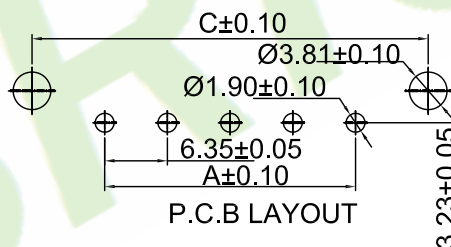

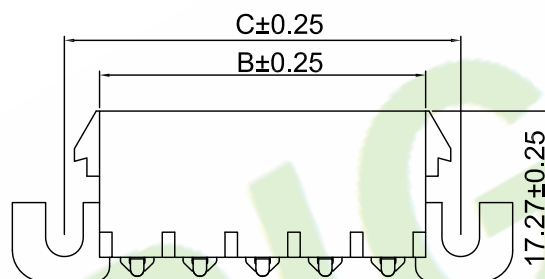


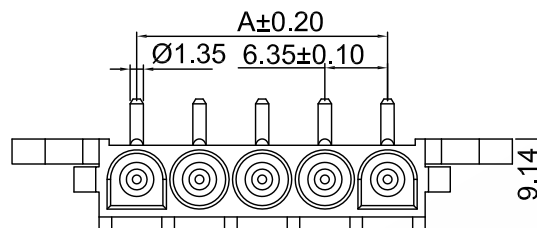
V:3u" Gold on contact;Tin on tail

M:15u" Gold on contact;Tin on tail

A2:30u" Gold on contact;Tin on tail

5:— A:In Bag

B:In Tray


**Ordering Information & Dimensions:**

PART NO.	Dimensions		
	A	B	C
2P	6.35	13.97	21.08
3P	12.70	20.32	27.43
4P	19.05	26.67	33.78
5P	25.40	33.02	40.13
6P	31.75	39.37	46.48
7P	38.10	45.72	52.83
8P	44.45	52.07	59.18
9P	50.80	58.42	65.53
10P	57.15	64.77	71.88

5X				DR.BY:	Judyyan	GENERAL TOLERANCE:	PART NO : A6351R-XXX-02-X
4X						LINEAR	DWG. NO.:
3X				CHKD.:	Mark	x.: ±0.30 x': ±5.0°	TITLE :
2X	Add code options	Judyyan	20220719			x.x: ±0.20 x.x': ±3.0°	6.35mm Pitch Wafer R/A Type
1X	ORIGINAL	Judyyan		APPD.:	Billy	x.xx: ±0.15 x.xx': ±2.0°	DATE: 13-Jul-2017
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10 x.xxx': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4