

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Phosphor bronze

Plated:See Ordering Information

Rating:

Current Rating:13.5A(12AWG)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:3.5m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2900V AC/Minute

Ordering Informat

A6351RM-XXX-XX-B

1 2 3 4 5 6 7

1:—Series No.

2:—R:R/A Type

3:—M:Male

4:—No. of Positions

5:—Q:Tin plated

V:3u" Gold on contact;Tin on tail

T1:10u" Gold on contact;Tin on tail

M:15u" Gold on contact;Tin on tail






A2:30u" Gold on contact;Tin on tail

6:—PIN length code:

D1=4.06mm

D2=3.30mm

7:—B:In Tube

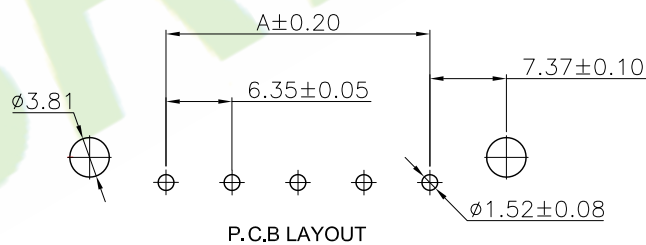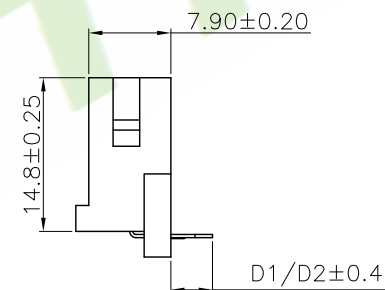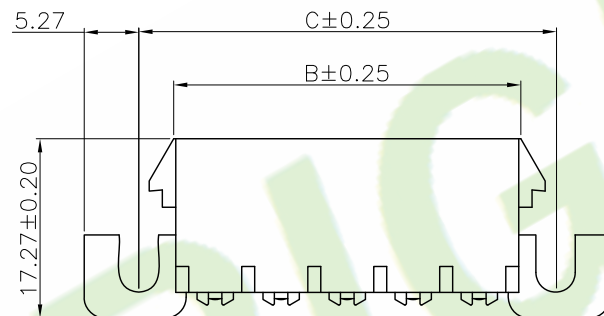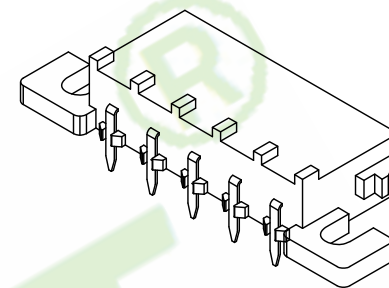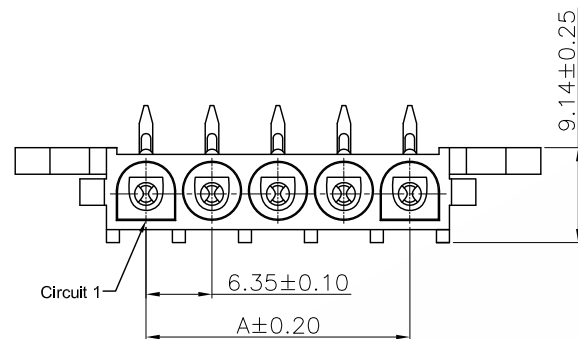

Ordering Information & Dimension:

Circuits	Dimensions		
	A	B	C
02	6.35	13.97	21.08
03	12.70	20.32	27.43
04	19.05	26.67	33.78
05	25.40	33.02	40.13
06	31.75	39.37	46.48
07	38.10	45.72	52.83
08	44.45	52.07	59.18
09	50.80	58.42	65.53
10	57.15	64.77	71.88


5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A6351RM-XXX-XX-B	
4X				Jack	CHKD.:	LINEAR	ANGLES	DWG. NO.:
3X	To perfect the drawings	Judyyan	20220719			X.: ±0.30	X': ±5.0°	
2X	ADD D2=3.30 TYPE	Sophia	20200629	Kenry	APPD.:	X.X: ±0.20	X.X': ±3.0°	TITLE : 6.35mm Pitch Wafer R/A Male Type
1X	ORIGINAL	Jack				X.XX: ±0.15	X.XX': ±2.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 15-Dec-2015

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4