

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:13.5 Amp(12AWG)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:3.5m Ohm Max

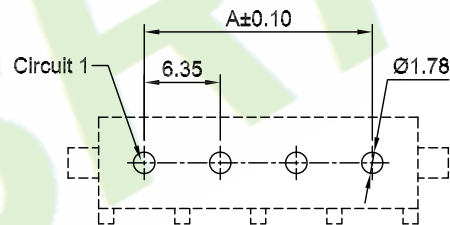

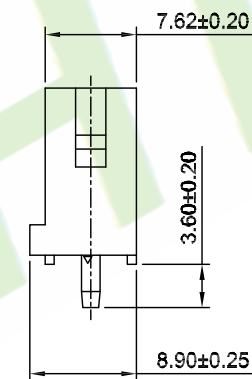
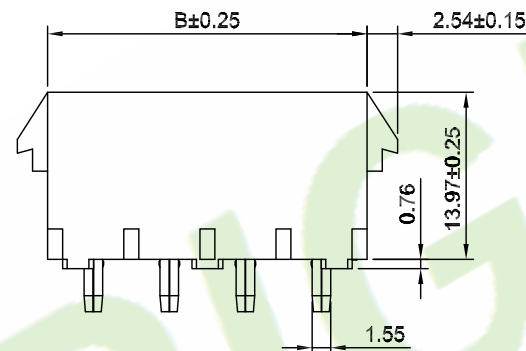

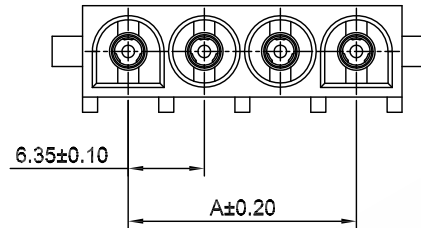
Insulator resistance:1000M ohm min.

Withstanding Voltage:2900V AC/Minute

Ordering Information**A6351S-XXX-01-X**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
C: In Tray

**P.C.B LAYOUT**
TOLERANCE:±0.05

Part NO.	Dimensions(mm)	
	A	B
2P	6.35	13.97
3P	12.70	20.32
4P	19.05	26.67
5P	25.40	33.02
6P	31.75	39.37
7P	38.10	45.72
8P	44.45	52.07


5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A6351S-XXX-01-X
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Kenry	X.: ±0.30	X': ±5.0°	TITLE :
2X	ORIGINAL	Samson			X.X: ±0.20	X.X': ±3.0°	6.35mm Pitch Wafer Straight Type
1X	ORIGINAL	Samson	A001	APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 04-Jun-2015
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4