

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Copper alloy

Rating:

Current Rating:2.5 Amp,30 Amp

Voltage Rating:400V AC/DC

Operating Temperature Range:-20°~+105°C

Electrical:

Insulator resistance:1000M ohm min.






Withstanding Voltage:500V AC/Minute

Ordering Information


A6358R-24FH-C

1 2 3 4 5 6

- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — F:Female
 5: — H:Selective Plated 30u" Gold
 in contact area;Selective
 100u" Min. Tin In tail area;
 Nickel overall
 6: — C:In Tray

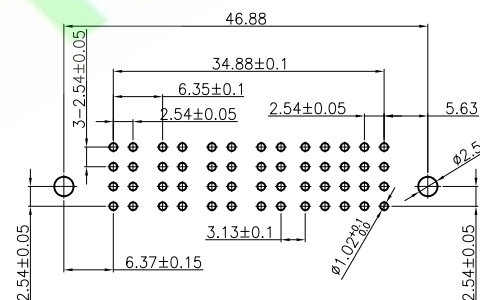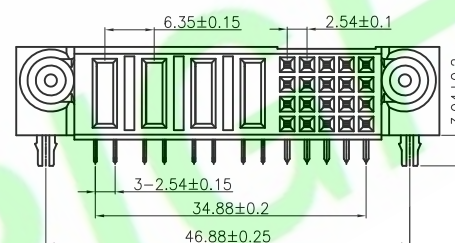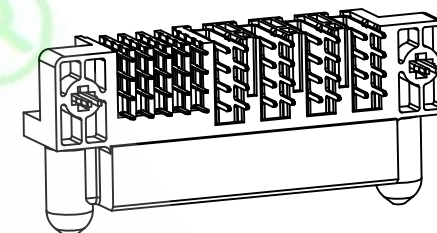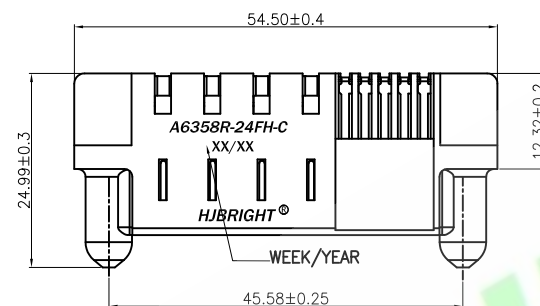

PCB LAYOUT

5X				DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A6358R-24FH-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Ren	x.: ±0.38	x': ±5.0°	TITLE : 6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A				
2X					x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Mark		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°	DATE: 8-Mar-2021				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°					
									SHEET: 1/1		A4
									SCALE: 1:1		
									UNIT: mm		
									THIRD ANGLE PROJECTION		

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4