

Specifications:



Material And Finish:

Insulator:GLASS FILLED WITH HIGH TEMP
THERMOPLASTIC UL94V-0 Color:Black

Signal Contact:COPPER ALLOY

Power Contact:HIGH CONDUCTIVITY COPPER

Plated:See Ordering Information

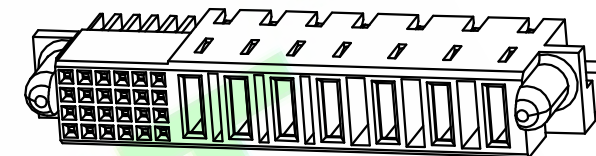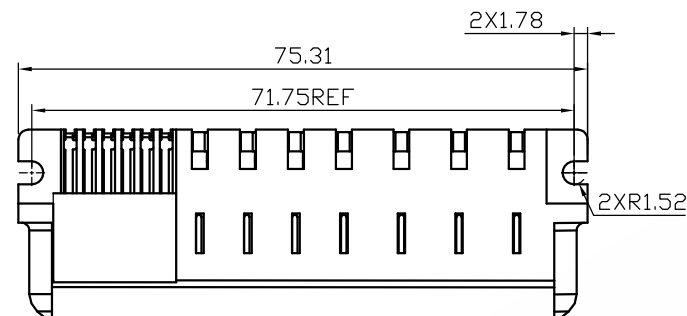

Ordering Information

A6358R-31FX-C-1

1 2 3 4 5

1: — Series No.

2: — R:R/A Type

3: — No. of Positions





4: — S:Matte Tin Plated

5: — A:In Bag

B:In Tube

C:In Tray

G:Tape&Reel

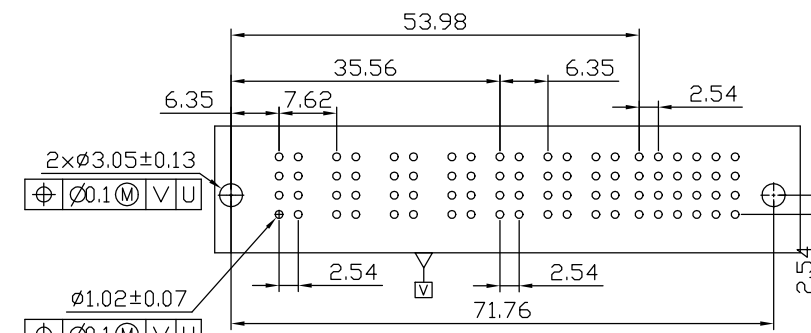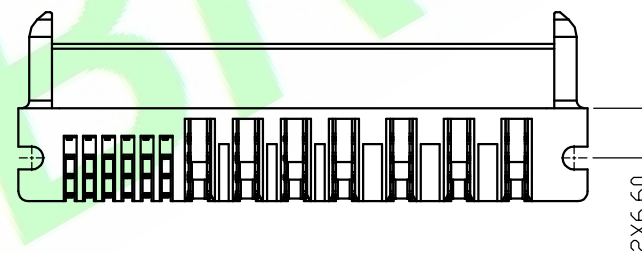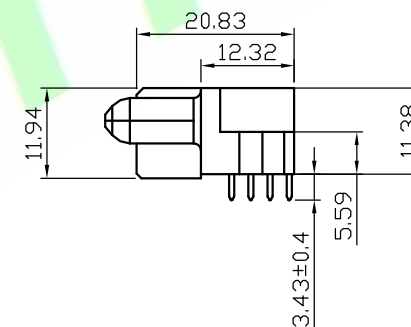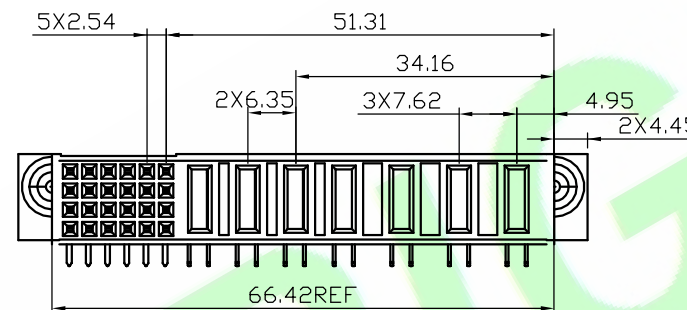

Recommended PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A6358R-31FX-C-1	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Zolin	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.:	X': ±5.0'	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION
2X				Sam	X.X: ±0.40	X.X': ±3.0'	3ACP 4HP+24S RA STB RECEPTACLE	SCALE: 1:1	
1X	ORIGINAL	Zolin		APPD.:	X.XX: ±0.25	X.XX': ±2.0'	DATE: 30-Sep-2026	UNIT: mm	
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0'			A4