

Specifications:**Material And Finish:**

Insulator:Nylon 46 UL94V-0

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1500V AC/Minute

Ordering Information**AVX400-XXQ-XM**

1 2 3 4 5

- 1:— Series No.
2:— No. of Positions
3:— Q: Tin Plated
4:— Color:
B: Black
W: White
L: Blue
Y: Yellow
R: Red
N: Green
O: Orange
BR: Brown
5:— M: W/ Mylar In Tape & Reel

Accepted Wire Gauge	Max Insulation
18 – 26 AWG Solid or Stranded	2.2mm

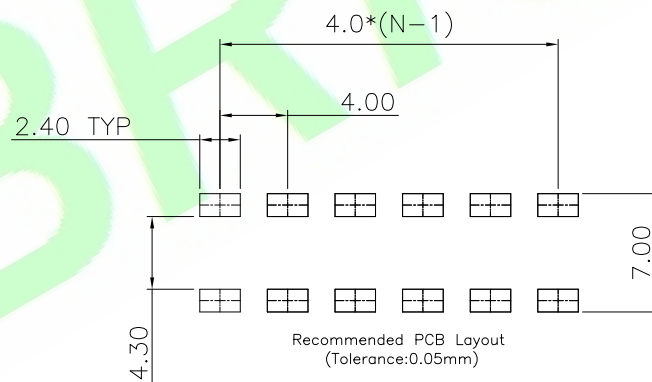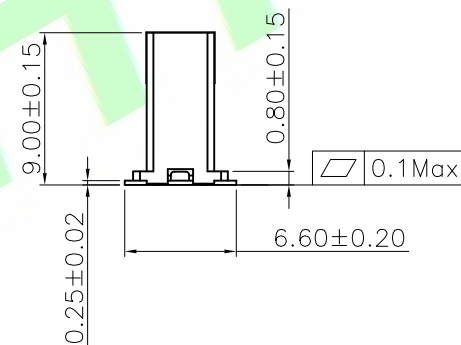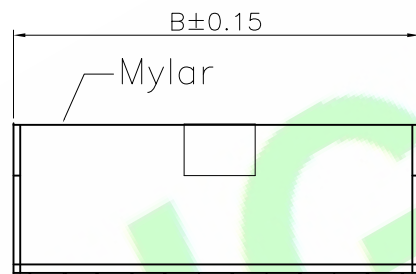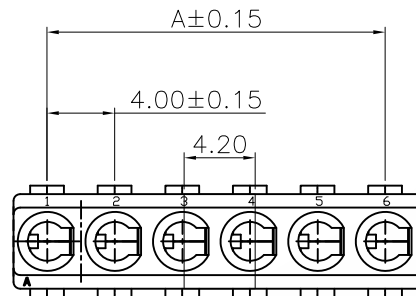

Poles	Dimensions (mm)	
	A	B
02P	4.00	8.00
03P	6.00	12.00
04P	8.00	16.00
05P	10.00	20.00
06P	12.00	24.00

5X			
4X			
3X			
2X	Change from CAP to Myra	Aren	20220825
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Mark
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.25	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : AVX400-XXQ-XM
DWG. NO.:
TITLE : AVX 4.0mm Pitch 1~6P SMT Type
DATE: 2-Aug-2022

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4