

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

B12722M-XXX-04-NX

1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
D:Tape&Reel

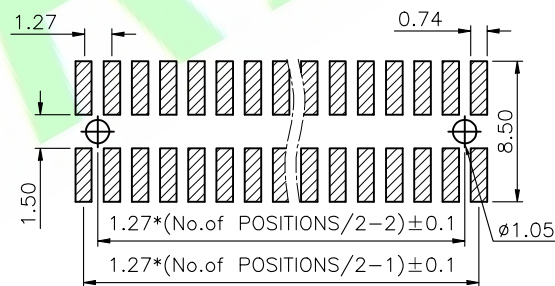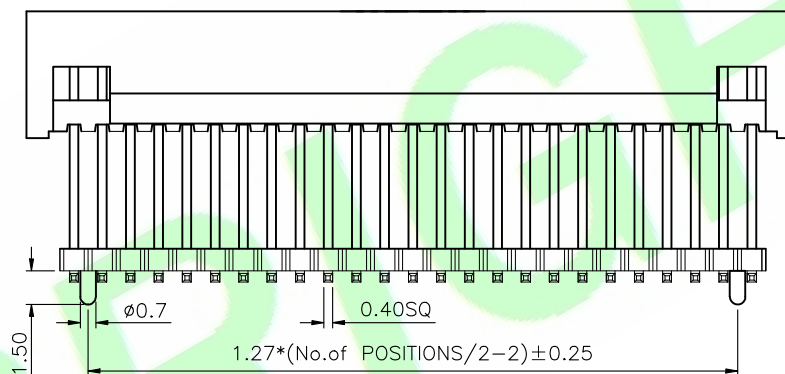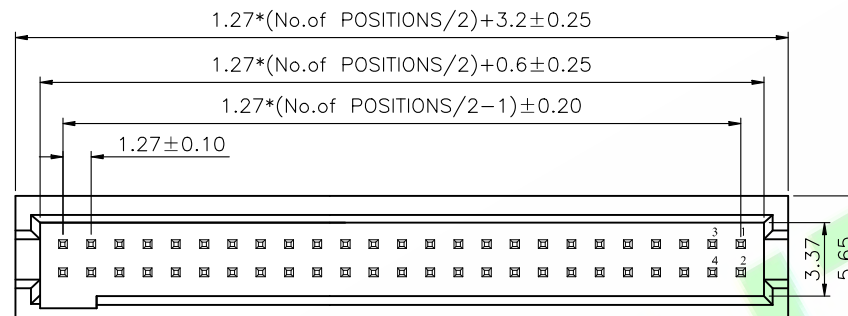

Recommended PCB Layout

DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B12722M-XXX-04-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED					
	LINEAR	ANGLES					DWG. NO.:		
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type					SHEET: 1/1	
	x.x: ±0.25	x.x': ±3.0°					SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm					
	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 27-Aug-2015						

1X	ORIGINAL	Kenry	ECN. NO.
REV.	DESCRIPTION	DR.BY	