

Specifications:

Material And Finish:

Insulator:Polyester UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:





Insulator resistance:5000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B1275M-XXX-03-XX
1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
I:3u"Gold
5: — Plastic material:
N:PA6T
C:LCP
6: — A:In bag
B:In Tube
C:Tray
F:Tape&Reel

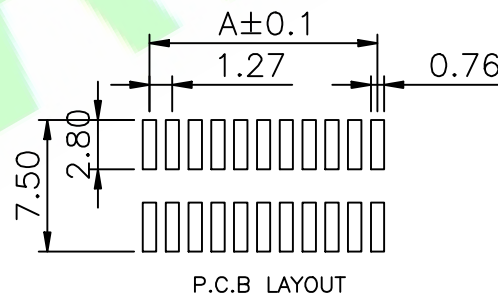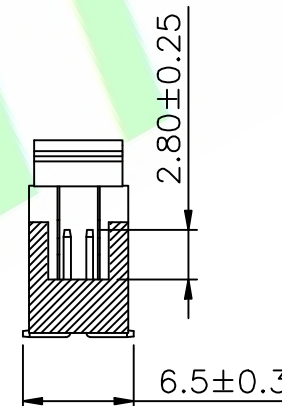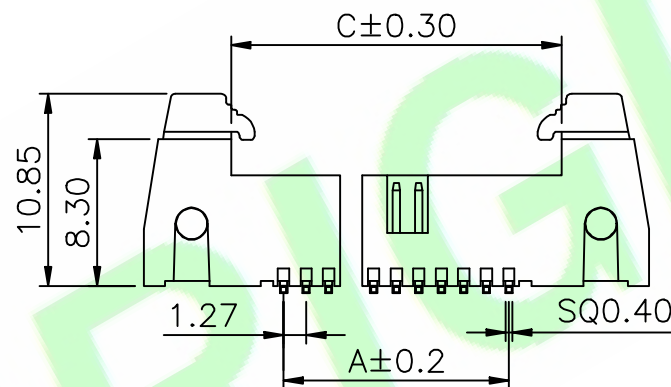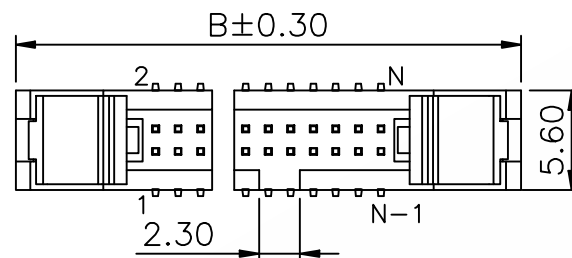

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
6	2.54	18.31	8.46	34	20.32	36.09	26.24
10	5.08	20.85	11.00	40	24.13	39.90	30.05
12	6.35	22.12	12.27	44	26.67	42.44	32.59
14	7.62	23.39	13.54	50	30.48	46.25	36.40
16	8.89	24.66	14.81	60	36.83	52.60	42.75
20	11.43	27.20	17.35	64	39.37	55.14	45.29
26	15.24	31.01	21.16	66	40.64	56.41	46.56
30	17.78	33.55	23.70	68	41.91	57.68	47.83

DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO.: B1275M-XXX-03-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±5.0°	X': ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE: 1.27mm Pitch Box Header SMT Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: Dec-5-2017			

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Add plated code	Aaron	20190626
1X	ORIGINAL	Aaron	
REV.	DESCRIPTION	DR.BY	ECN. NO.