




Specifications:
Material And Finish:
Insulator:PBT/PA6T UL94V-0 Color:Black
Contact:Copper Alloy
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°C~+105°C

Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
B2546R-XXX-04-XX
1 2 3 4 5 6

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
C:Gold 5u”
D:Gold 10u”
H:Selective Gold Plated
S:Contact plated Gold flash;Solder tail: Tin Plated
Q: Tin Plated
- 5: — P:PBT
N:PA6T
- 6: — A:In bag
B:In Tube
C:In Tray

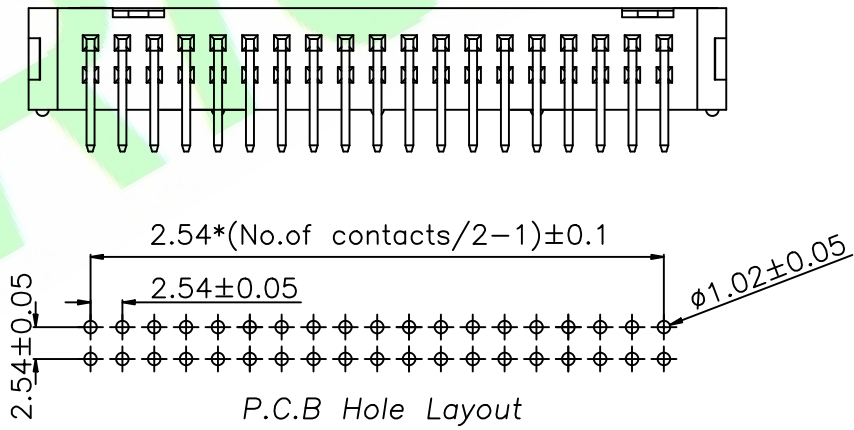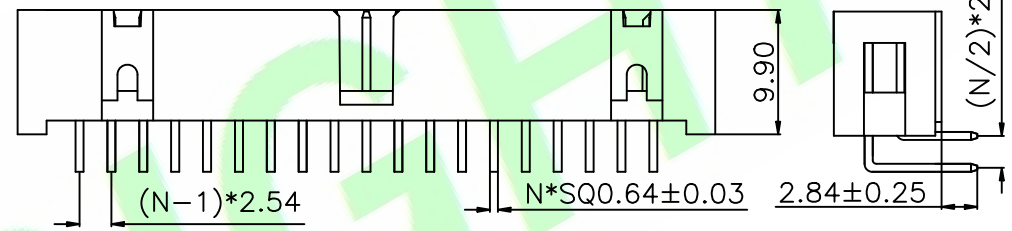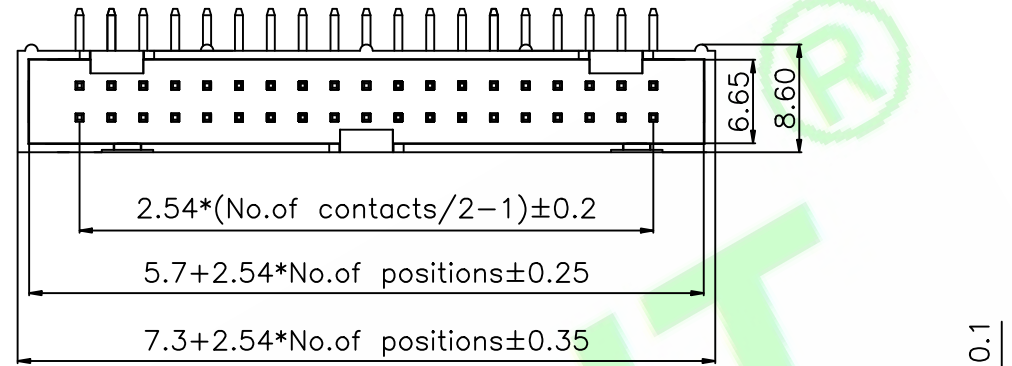

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : B2546R-XXX-04-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
	LINEAR	ANGLES					DWG. NO.:
CHKD.: Judyyan	x.: ±0.50	x': ±5.0°	TITLE : 2.54mm Pitch Box Header R/A Type	SHEET: 1/1		A4	
	x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1			
APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°		DATE: 21-Jul-2024			UNIT: mm
	x.xxx: ±0.10	x.xxx': ±1.0°					THIRD ANGLE PROJECTION

1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.