







Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:Gold over Nickel Or Tin
 Rating:
 Current Rating:3.0 Amp
 Voltage Rating:24V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:30m Ohm Max
 Insulator resistance:500M ohm min.
 Dielectric Voltage:500V AC/Minute
 Electrical Life:5000cycles

Ordering Information
 BC300H-XXXF-XX-X
 1 2 3 4 5 6 7

- 1: — Series No.
- 2: — Horizontal SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q:Tin Plated
S:Matte Tin Plated
- 5: — F:Female
- 6: — 01:D=2.40,E=4.30
02:D=3.50,E=5.40
- 7: — G:In Tape&Reel


PIN	Dim.A	Dim.B	Dim.C
02	6.00	3.00	
03	9.00	6.00	3.00
04	12.00	9.00	6.00
05	15.00	12.00	9.00
06	18.00	15.00	15.00
07	21.00	18.00	15.00
08	24.00	21.00	18.00

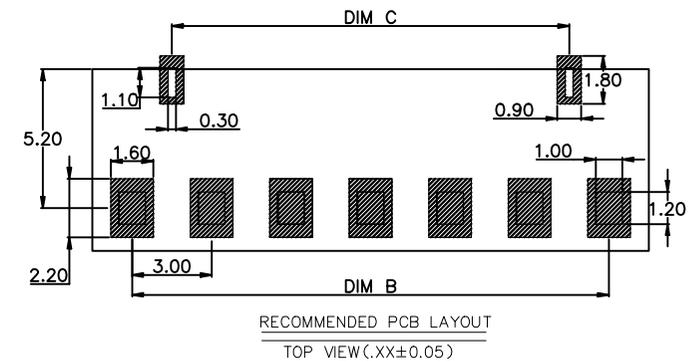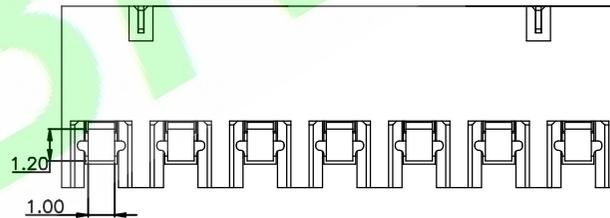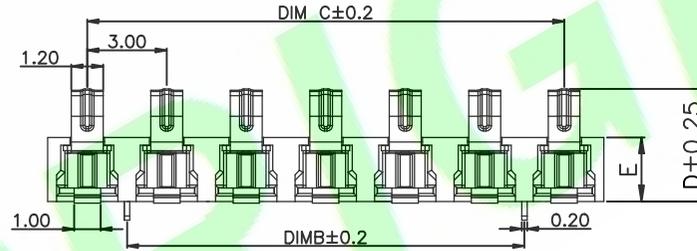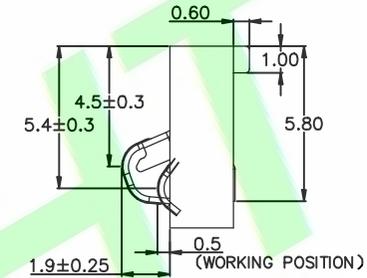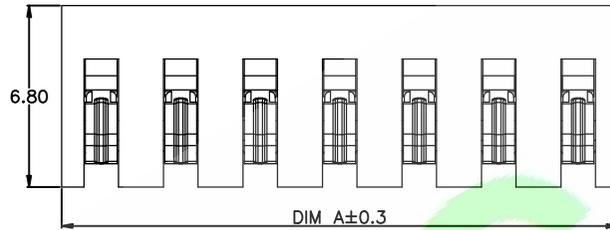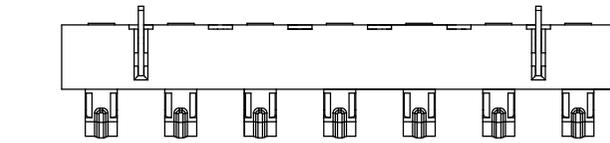

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : BC300H-XXXF-XX-X	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :	
	X.X: ±0.20	X.X': ±3.0°	3.0mm PITCH BATTERY CONNECTOR Female	
	X.XX: ±0.15	X.XX': ±2.0°	DATE: 16-Mar-2022	
	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.