








Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0 Color:Gray
 Contact:Phosphor Bronze
 Plated:Gold over Nickel

Rating:
 Current Rating:3.0 Amp
 Voltage Rating:12V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:30m Ohm Max
 Insulator resistance:500M ohm min.
 Dielectric Voltage:500V AC/Minute
 Electrical Life:5000cycles

Ordering Information
 BC400H-XXAF-01-X
 1 2 3 4 5 6

- 1: Series No.
- 2: Horizontal SMT Type
- 3: No. of Positions
- 4: A:Gold Flash
- 5: F:Female
- 6: G:In Tape&Reel

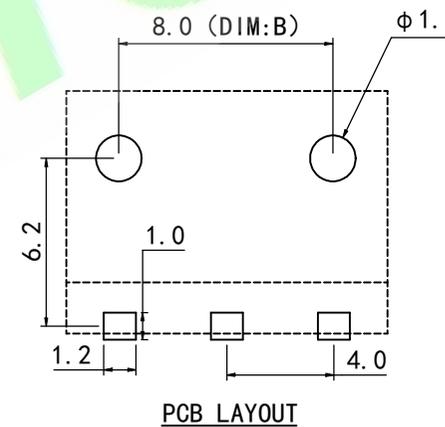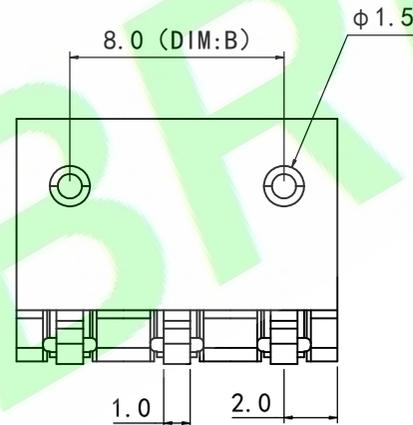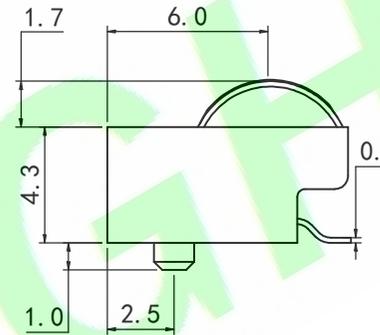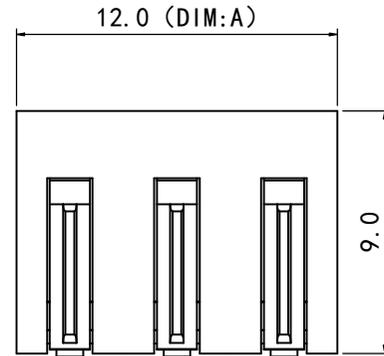


PIN	DIM:A	DIM:B	DIM:C
01	4.00	2.80	
02	8.00	4.00	4.00
03	12.00	8.00	8.00
04	16.00	12.00	12.00
05	20.00	16.00	16.00
06	24.00	20.00	20.00
07	28.00	24.00	24.00
08	32.00	28.00	28.00
09	36.00	32.00	32.00
10	40.00	36.00	36.00

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : BC400H-XXAF-01-X
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :
	X.X: ±0.25	X.X': ±3.0°	4.0mm PITCH BATTERY CONNECTOR Female
	X.XX: ±0.20	X.XX': ±2.0°	DATE: 16-Mar-2022
	X.XXX: ±0.15	X.XXX': ±1.0°	

HJBRIGHT 东莞市华晶电子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.