

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon PA66 UL94V-0 Color:Black.

Contact:Phosphor Bronze.

Plated:See Ordering Information.

Rating:

Current Rating:30 Amp.

Operating Temperature Range:-30°~+85°C.

Electrical:

Insulator resistance:DC 1000V/100M ohm.

Contact resistance:Power PIN 5m Ohm Max.

Signal PIN 10m Ohm Max.

Withstanding Voltage:Power PIN 2500V AC/Minute






Signal PIN 1000V AC/Minute

Ordering Information

BC6001S-06NF-01-A

1 2 3 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — N: Nicke
5: — F: Female
6: — A: In Bag

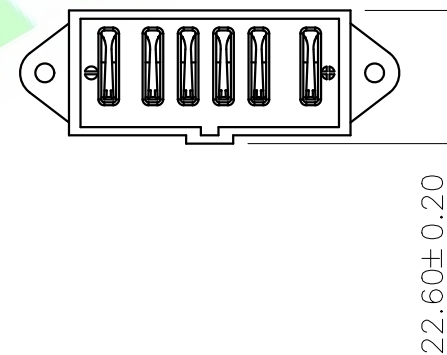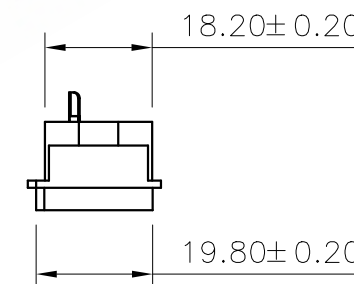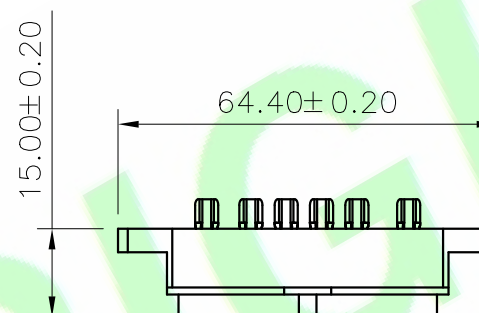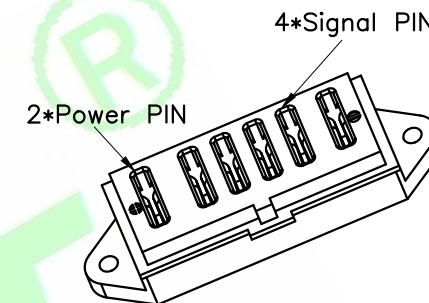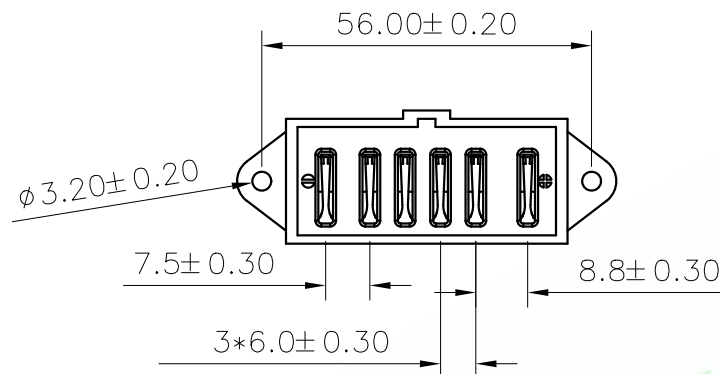

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : BC6001S-06NF-01-A	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.:	x': ±3.0°	TITLE : Battery vertical Female connectors	
	x.x: ±0.20	x.x': ±3.0°		
APPD.: Billy	x.xx: ±0.10	x.xx': ±3.0°	DATE: 17-Jun-2013	
	x.xxx: ±0.05	x.xxx': ±3.0°		

HJBRIGHT ® 東莞市華晶電子有限公司			A4
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
SHEET: 1/1	SCALE: 1:1		
UNIT: mm	THIRD ANGLE PROJECTION		

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO