


RoHS Compliant



Assembly Male:
BM0400M-XXAM-01-G

Specifications:

Material And Finish:



Housing:LCP Color:Black
Contact:C5240ESH
Plating:Gold Flash
Plated:See Ordering Information

Rating:

Current Rating:0.3 Amp
Operating Temperature Range:-55°~+125°C

Electrical:


Contact resistance: 90m Ohm Max,With AC 20mV, 1kHz and 1mA
Insulator resistance:50M ohm min,With DC 100V
Durability:30 Cycles

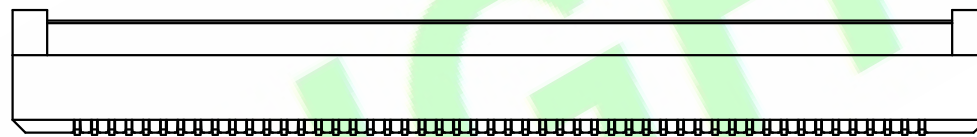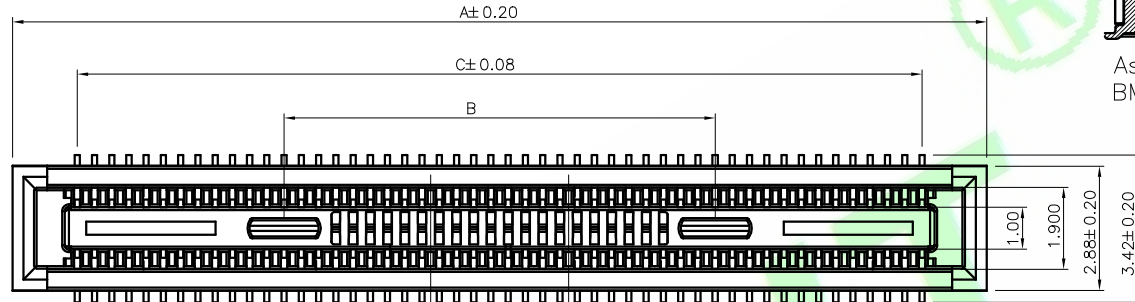

Ordering Information

BM0400M-XXAF-04-G
1 2 3 4 5 6

- 1: Series No.
- 2: M:SMT Type
- 3: No. of Positions
- 4: A:Gold flash
- 5: F:Female
- 6: G:W/O Cap In Tape&Reel

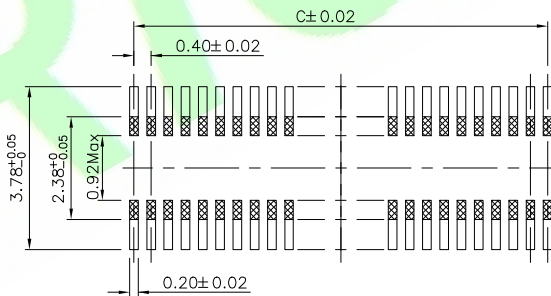

Recommended PCB Layout
(Tolerance: ±0.03)
(Without reinforcing metal fitting)

PIN	DIM.A	DIM.B	DIM.C	DIM.D
10	4.60		1.60	1.00
12	5.00		2.00	1.00
20	6.60	1.93	3.60	1.00
24	7.40	2.43	4.40	1.20
30	8.60	3.18	5.60	1.50
34	9.40	3.68	6.40	2.30
40	10.60	5.08	7.60	3.20
44	11.40	5.86	8.40	3.20
50	12.60	5.50	9.60	3.20
60	14.60	6.00	11.60	3.20
70	16.60	7.00	13.60	3.20
80	18.60	8.00	15.60	3.20
90	20.60	9.00	17.60	3.20
100	22.60	10.00	19.60	3.20
120	26.60	14.00	23.60	3.20

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : BM0400M-XXAF-04-G	
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:	
	X.: ±0.30	X': ±3.0°	TITLE : 0.4mm Pitch BTB Female SMT Type H3.00mm	
	X.X: ±0.25	X.X': ±2.0°		
APPD.: Billy	X.XX: ±0.15	X.XX':	DATE: 16-Jul-2024	
	X.XXX: ±0.10	X.XXX':		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4