

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:COPPER ALLOY

Ground:BRASS(MATTE TIN PLATED)

Rating:

Current Rating:5.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:80m Ohm Max

Insulator resistance:1000M Ohm min.

Dielectric Voltage:600V AC/Minute

Ordering Information**BM0500H-XXXF-02-G**

1 2 3 4 5 6

1:— Series No.

2:— H:Horizontal SMT Type

3:— No. of Positions

4:— A:Gold Flash

I:1u" Gold on contact;Gold flash on tail

J:3u" Gold on contact;Gold flash on tail

C:5u" Gold on contact;Gold flash on tail


D:10u" Gold on contact;Gold flash on tail


K:15u" Gold on contact;Gold flash on tail

P:30u" Gold on contact;Gold flash on tail

5:— F:Female

6:— G:W/O Cap In Tape&Reel

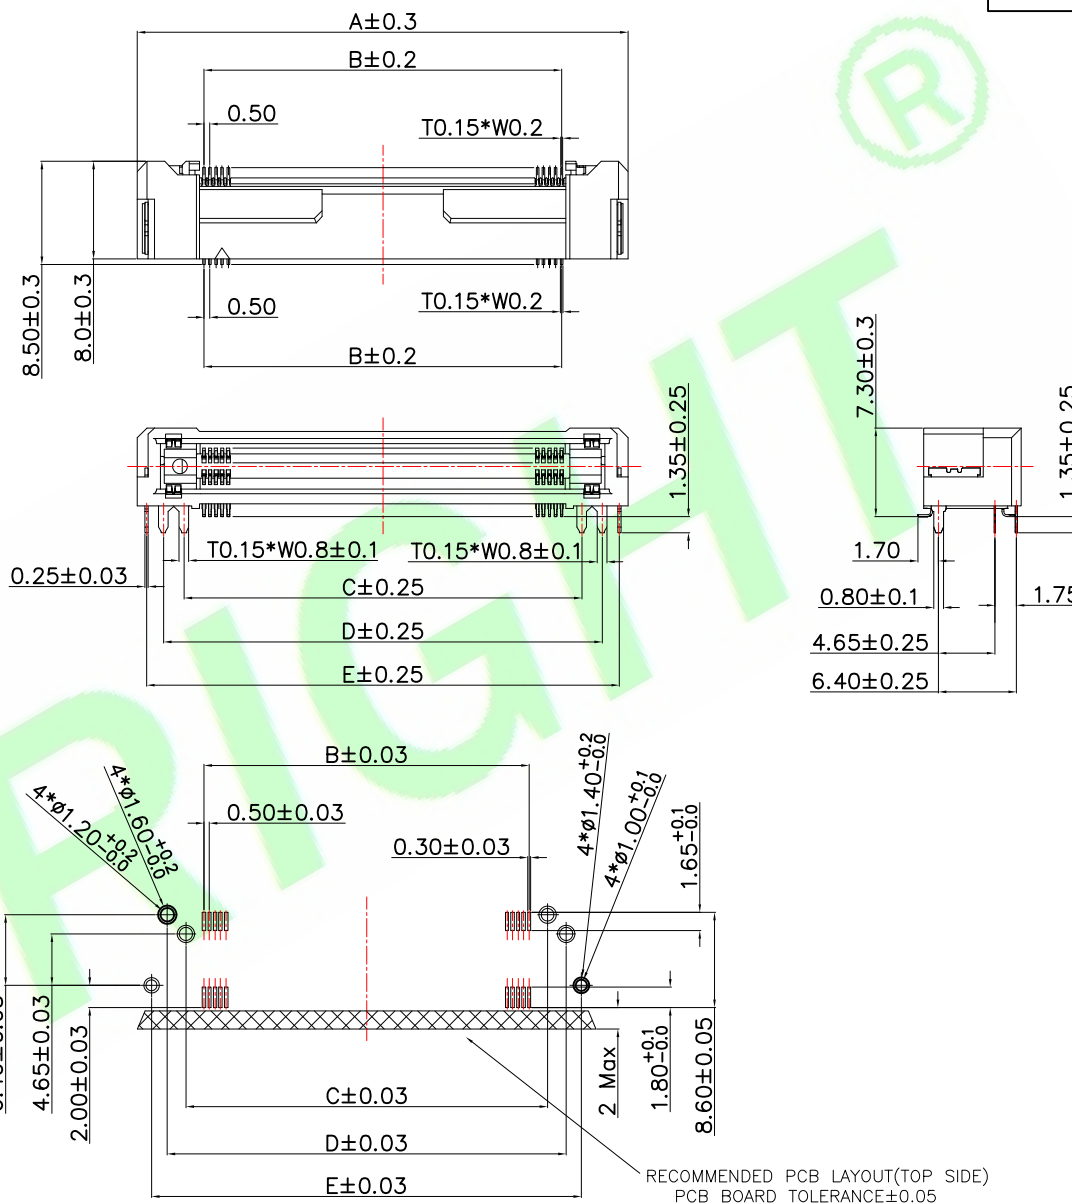

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : BM0500H-XXXF-02-G	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: $\pm 5.0^\circ$	X.X: $\pm 3.0^\circ$	TITLE : BTB 0.5mm CONNECTOR/F	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.XX: ± 0.35	X.XX: $\pm 3.0^\circ$	DATE: 14-Oct-2022	SCALE: 1:1	
1X	ORIGINAL	Judyyan			X.XXX: ± 0.25	X.XXX: $\pm 2.0^\circ$		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.15	X.XXX: $\pm 1.0^\circ$			A4