


J1
SIDE A
06~80PIN

J2
SIDE B
06~80PIN

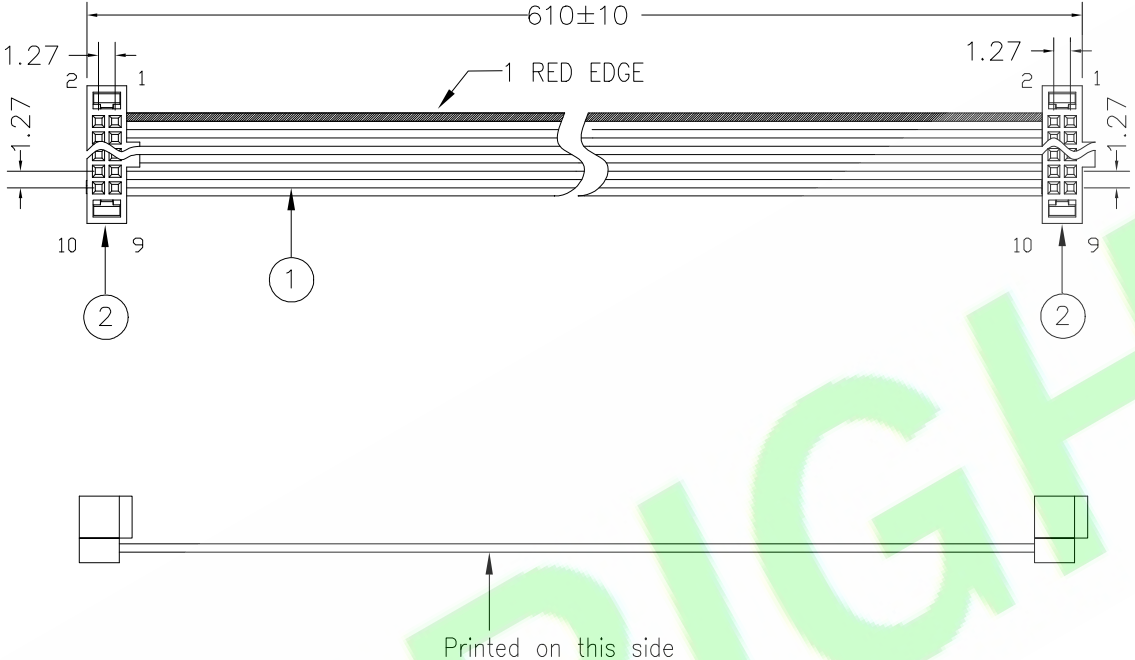


Ordering Information
C1272-XXX-XXX-01
1 2 3 4

Series No. 1: — Series NO.
2: — No. of Positions
06:2*3PIN
08:2*4PIN
.....
80:2*40PIN
3: — A:Gold flash
J:Gold 1u”
P:30u” Gold on contact;other 2u”
4: — Wire Length
605:L=605mm
610:L=610mm
.....

Notes:

1. Connector must be mounted 90°±1° to Cable.
2. Ensure connectors are installed fully seated.
3. Adjacent conductors must not be shorted
4. Trim cable flush with connectors ensuring ends of conductors are not frayed.

2	IDC	1.27IDG-10H(2) PBT Black Phosphorus Copper All Gold G/F	Black	L mm
1	Cable Wire	UL2678 30WG PITCH:0.635(10movement) (Lian) (ROHS)	Gray	2
ITEM	Part name	Description	Color	QTY

DR.BY.: Yawen	GENERAL TOLERANCE:		PART NO : C1272-XXX-XXX-01	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES				
CHKD.: Tony	1~150: ±3	x: ±5.0°	TITLE : CABLE ASSY	SHEET: 1/1		A4
	150~300: ±5	x.x: ±3.0°		SCALE: 1:1		
APPD.: Billy	300~450: ±10	x.xx: ±2.0°		UNIT: mm		
		x.xxx: ±1.0°	DATE: 28-Oct-2025	THIRD ANGLE PROJECTION		

1X	ORIGINAL	Yawen	ECN. NO.
REV.	DESCRIPTION	DR.BY	