


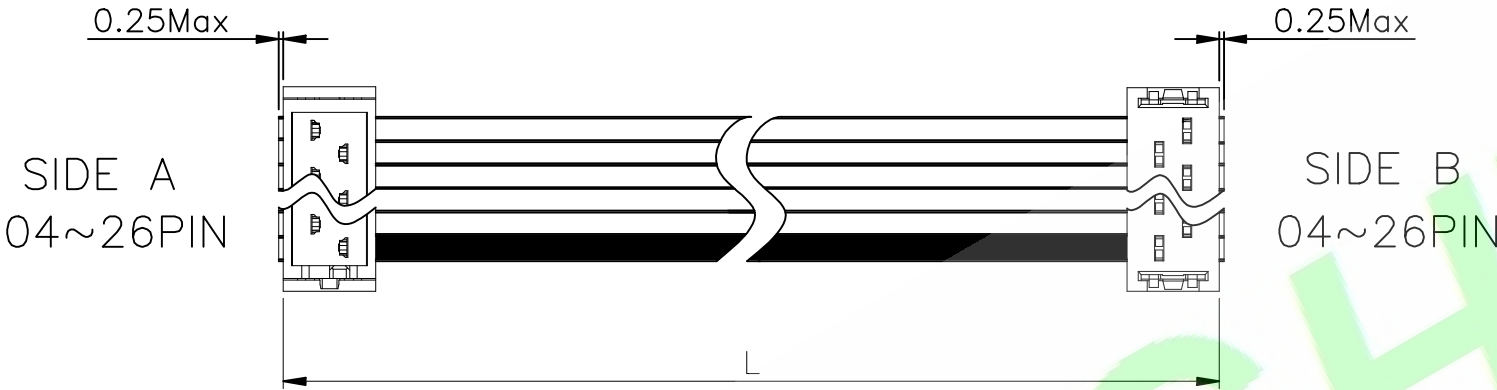

Ordering Information
C2542-XXQ-XXX-01

- 1 2 3
- 1:— Series No.
2:— No.of Positions
04:2*2PIN
06:2*3PIN
.....
26:2*13PIN
3:— Wire Length
105:L=105mm
110:L=110mm
.....

Notes:


1. Connector must be mounted $90^{\circ} \pm 1^{\circ}$ to Cable.
2. Ensure connectors are installed fully seated.
3. Adjacent conductors must not be shorted
4. Trim cable flush with connectors ensuring ends of conductors are not frayed.

2	Cable Wire	UL2651 28AWG PH1.27mm 105°C 300V VW-1	Wenchang	PER DESCRIPTION		L mm
1	IDC	2.54mm Pitch IDC 2*NP Red	BRIGHT	DP2541-XXQ-01-A		2
ITEM	Part name	Description	Manufacturer	Manufacturer P/N	Color	QTY

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : C2542-XXQ-XXX-01	
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:	
	1~150: ±3	X°: ±5.0°	TITLE :	
	150~300: ±5	X.X°: ±3.0°	CABLE ASSY, Micro-Match MOW-MOW	
APPD.: Billy	300~450: ±10	X.XX°: ±2.0°	DATE: 1-Nov-2024	
		X.XXX°: ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.