








Specifications:  
 Material And Finish:  
 Insulator:PBT UL94V-0 Color:Black  
 Contact:Brass  
 Plated:See Ordering Information

Rating:  
 Current Rating:1.0 Amp  
 Voltage Rating:250V AC/DC  
 Operating Temperature Range:-40~+105°C


Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:500V AC/Minute

Ordering Information  
 CS2002-XXX-XX-YX-X  
 1 2 3 4 5 6

- 1: Series No.
- 2: No. of Positions
- 3: A:Gold Flash  
H:Selective Gold Plated  
M:Selective 15u" Gold Plated  
Q: Tin Plated
- 4: 01:W/SR  
02:W/O SR
- 5: A:In bag  
B:In Tube  
C:In Tray
- 6: 0:Without Hump  
1:With Hump

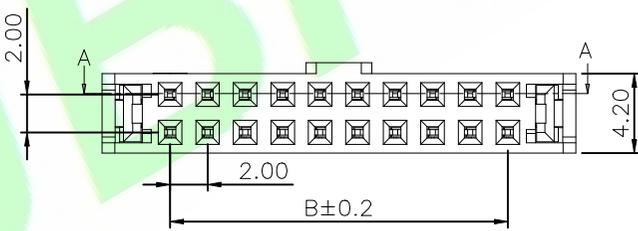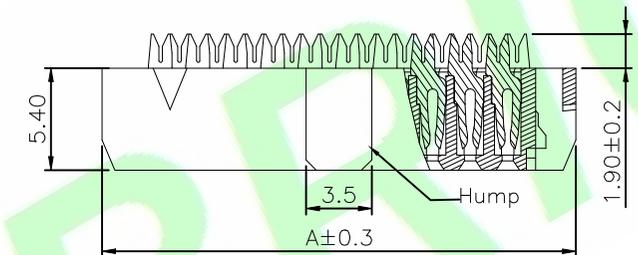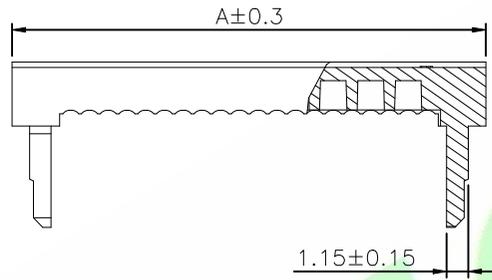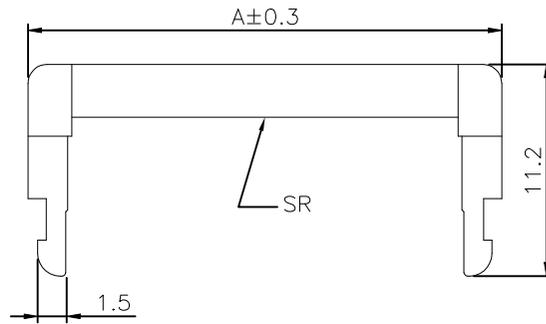

PART NO	Dim. A	Dim. B
06	11.2	4.0
08	13.2	6.0
10	15.2	8.0
12	17.2	10.0
14	19.2	12.0
16	21.2	14.0
18	23.2	16.0
20	25.2	18.0
22	27.2	20.0
24	29.2	22.0
26	31.2	24.0
28	33.2	26.0
30	35.2	28.0
34	39.2	32.0
36	41.2	34.0
40	45.2	38.0
44	49.2	42.0
50	55.2	48.0
60	65.2	58.0



DR.BY.: Jack	GENERAL TOLERANCE:		PART NO : CS2002-XXX-XX-YX-X
CHKD.: Kenry	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.00MM PITCH MFY系列IDC
	X.X: ±0.20	X.X': ±3.0°	DATE: 30-Sep-2015
	X.XX: ±0.15	X.XX': ±2.0°	
	X.XXX: ±0.10	X.XXX': ±1.0°	

**HJBRIGHT®** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**

3X	New specifications added	Judyyan	20250717
2X	Add plated code	Aaron	20171201001
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.