

Specifications:

Material And Finish:

Insulator:PPS UL94V-0 Color:Black
 Contact:Brass,Machined CuZn38Pb2
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Operating Voltage:60VAC/DC
 Operating Temperature Range: $-40^{\circ} \sim +105^{\circ}$ C





Electrical:

Contact resistance: $\leq 4m\Omega$ /Contact.
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

D2541S-04A-03-A
 1 2 3 4 5

- 1:— Series No.
- 2:— S:Straight Type
- 3:— No. of Positions
- 4:— A:Gold Flash
- H:Selective Gold Plated
- 5:— A:In bag

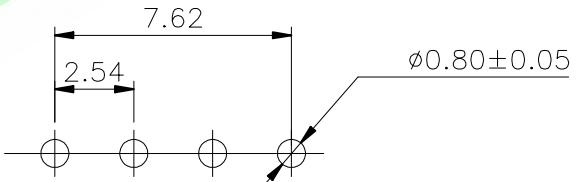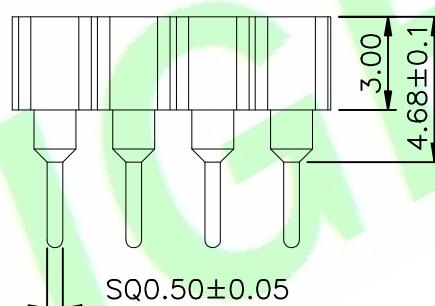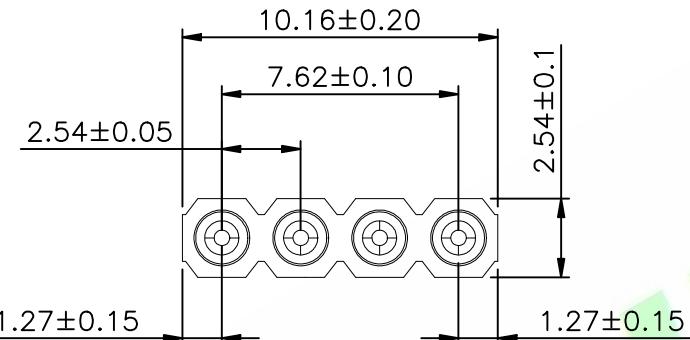

PCB LAYOUT

5X			DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : D2541S-04A-03-A	DWG. NO.: TITLE : IC Socket DIP Type	HJBRIGHT® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				LINEAR	ANGLES			
3X			CHKD.: Tony	x.: ± 0.30	x*: $\pm 5.0^{\circ}$			
2X	依客户要求, 更改为专用图纸	Aaron	APPD.: Billy	x.x: ± 0.20	x.x*: $\pm 3.0^{\circ}$			
1X	ORIGINAL	Kenry		x.xx: ± 0.15	x.xx*: $\pm 2.0^{\circ}$			
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ± 0.10	x.xxx*: $\pm 1.0^{\circ}$	DATE: 3-Aug-2015		
1	2	3	4	5	6		UNIT: mm	A4
							THIRD ANGLE PROJECTION	