

Specifications:

Material And Finish:

Insulator:PPS UL94V-0 Color:Black
 Contact:Brass,Machined CuZn38Pb2
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Operating Voltage:60VAC/DC
 Operating Temperature Range:-40° ~+105° C


Electrical:

Contact resistance:≤ 10mΩ/Contact.
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

D2541S-XXX-03-X
 1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
 H: Selective Gold Plated
 I: Gold 3u"
 W: Gold 5u"
 R: Gold 10u"
 Q: Tin Plated
- 5: — A: In bag
 B: In Tube
 C: In Tray

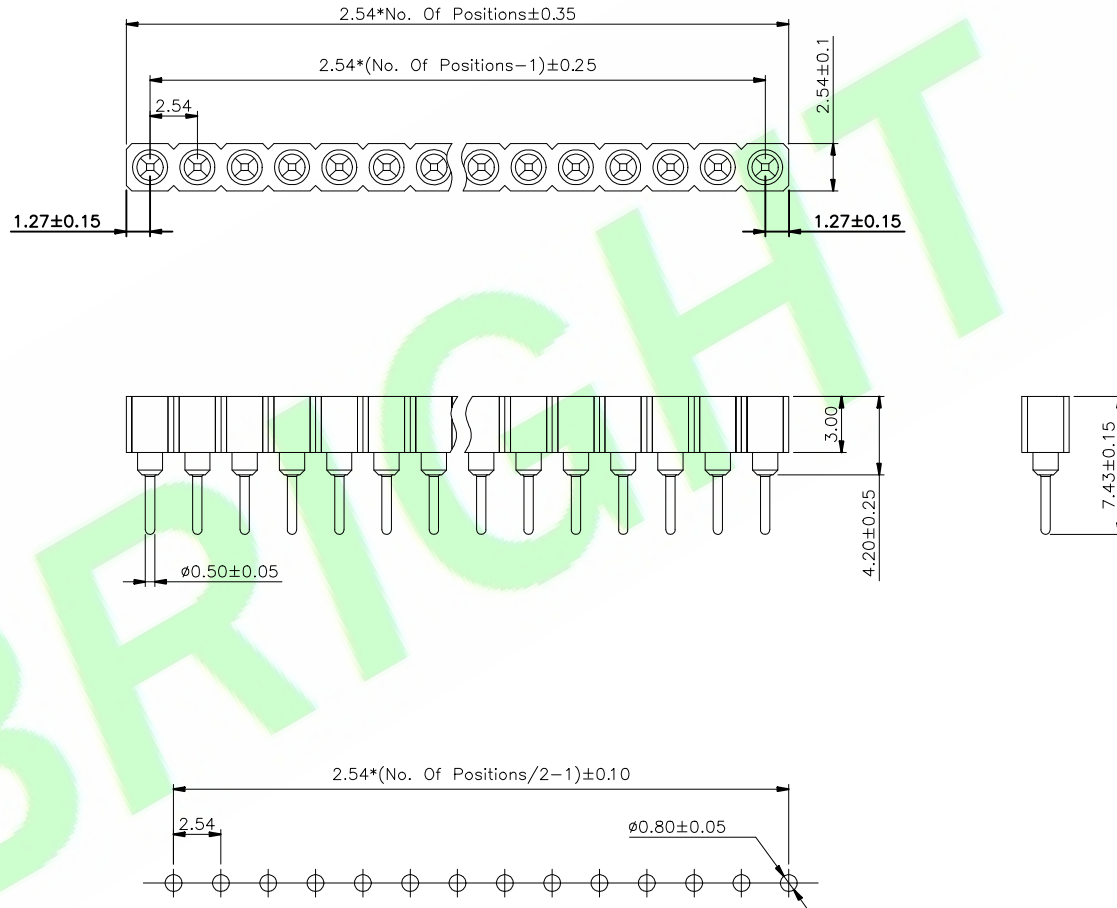

5X				DR.BY.: Kenry
4X				CHKD.: Tony
3X				APPD.: Billy
2X	ORIGINAL	Kenry		
1X	DESCRIPTION	DR.BY	ECN. NO.	
REV.				

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : D2541S-XXX-03-X
DWG. NO.:
TITLE : IC Socket DIP Type
DATE: 23-Sep-2016

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4