

Specifications:

Material And Finish:

Shell: Steel Material, Front shell Nickel

Finished Back shell sn finished

Insulator: PBT+30%GF UL94V-0 Color: White

Contact Material: Brass

Contact Finished: Full 1μ" Gold

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Operating Temperature Range: -55°~+105°C

Electrical:

Contact resistance: 20m Ohm Max





Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC Min

Ordering Information

DB02R-XXMJ-01-X
1 2 3 4 5 6

- 1: Series No.
2: R:R/A Type
3: No. of Positions
4: M: Male
5: J: Gold 1μ"
6: A: In Bag
B: In Tube
C: In Tray

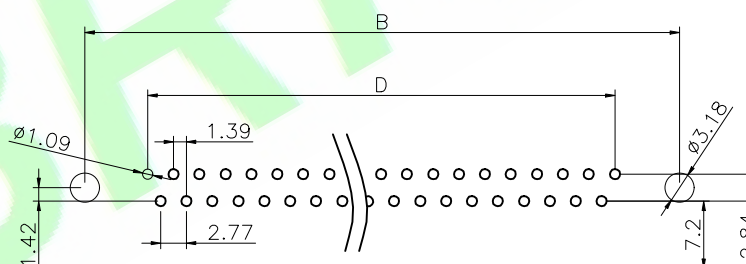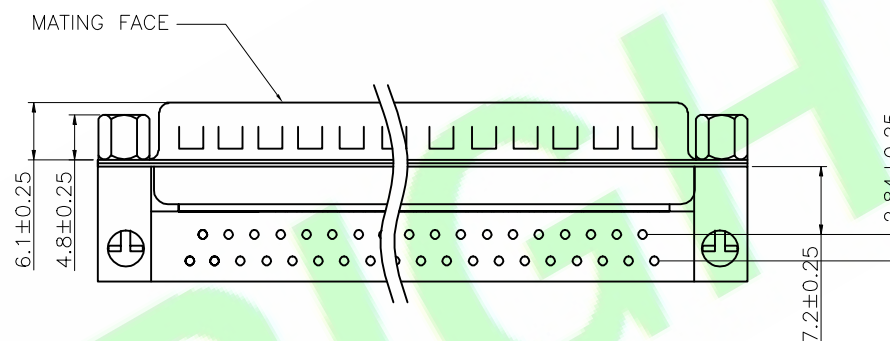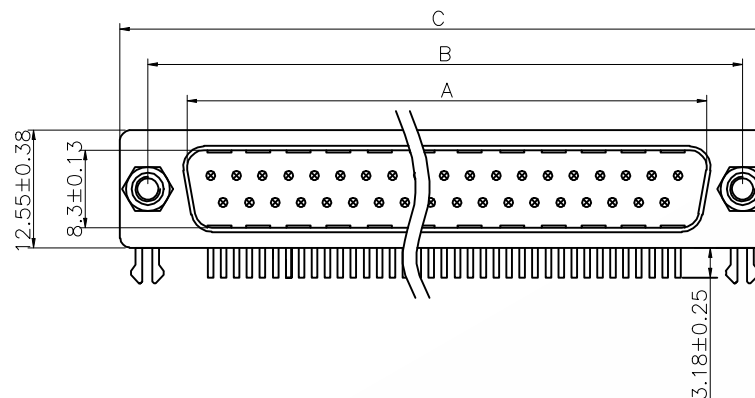

P.C.B LAYOUT

No. of Contact	A±0.25	B±0.13	C±0.38	D±0.25
09	16.33	24.99	30.81	11.08
15	24.66	33.32	39.41	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.05	69.32	49.86

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : DB02R-XXMJ-01-X	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	X.: ±0.38	X': ±2.0°	TITLE : DR Male head with Plastic Bracket bent 7.20 Rivet lock	
	X.X: ±0.35	X.X': ±1.0°		
APPD.: Billy	X.XX: ±0.25	X.XX': ±0.5°	DATE: 26-Dec-2023	
	X.XXX: ±0.15	X.XXX': ±0.1°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E TECHNOLOGY ELECTRONIC LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGNINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.