

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Contact:Brass

Crust:Spcc,Plated Ni

Screw:Steel,Plated Ni

Rating:

Current Rating:5A Amp

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

DB07S-XXMX-XX-XC

1 2 3 4 5 6 7 8

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — M: Male

5: — 5: Contact Gold flash/Tail Sn120u"~200u"

6: Contact 10u" Gold/Tail Sn120u"~200u"

7: Contact 15u" Gold/Tail Sn120u"~200u"

8: Contact 30u" Gold/Tail Sn120u"~200u"

9: Contact 15u" Gold/Tail Gold Flash

6: — 01: With stud

02: Without stud




7: — Color:

B: Black


W: White

BL: Blue


8: — C: In Tray

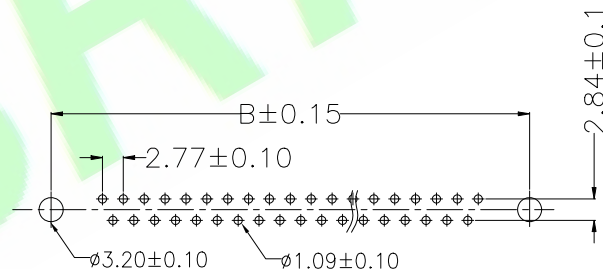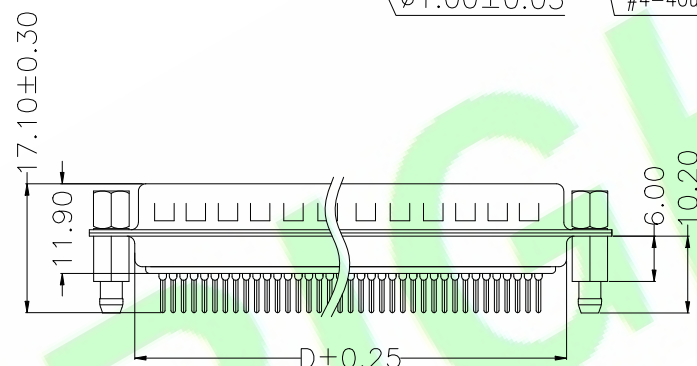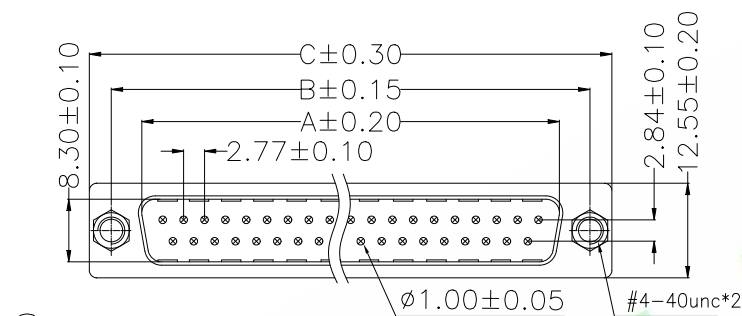

P.C.B.PLYOUT



01: With stud



02: Without stud

PIN	A	B	C	D
9	16.90	24.99	30.80	19.30
15	25.25	33.30	39.20	27.60
25	38.96	47.04	53.10	41.10
37	55.42	63.50	69.34	57.30

5X			
4X			
3X			
2X	The new specification	Judyyan	20220802
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY: Jack
CHKD.: Kenry
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.50	X': ±3.0°
X.X: ±0.38	X.X': ±2.0°
X.XX: ±0.25	X.XX':
X.XXX:	X.XXX':

PART NO : DB07S-XXMX-XX-XC
DWG. NO.:
TITLE : D-SUB Straight, SOLDER TAIL Male
DATE: 04-Jul-2015

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4