

Specifications:

Material And Finish:

Contacts:Brass

Insulator: PBT Or High Temperature Plastic

UL 94V-0 Rated.

Shell: Cold Roller Steel.

Finishes:

Contact: Gold Flash.

Shell: Nickel Plated.

Contact Insertion Force: 341 g. Maximum.

Contact Separation Force: 21 g. Minimum

Rating:

Current Rating: 3 Amps

Operating Temperature Range: $-55^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 25 Milliohms MAX

Insulator resistance: 1000 Megohms Minimum at DC 500V

Withstanding Voltage: 1000V AC/Minute

Ordering Information

DB104R1-09FX-01-X

1 2 3 4 5 6

1: Series No.

2: R/R/A Type

3: No. of Positions

4: F: Female





5: A: Gold Flash

H: Gold flash on contact;

Tin on tail


6: B: In Tube

C: In Tray

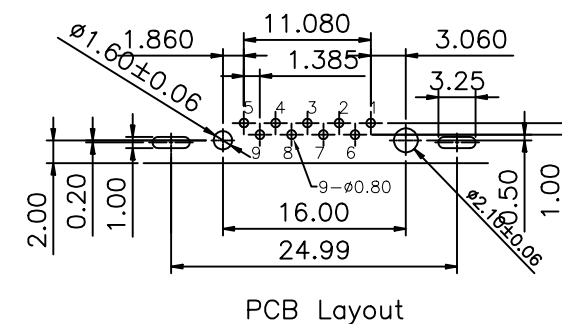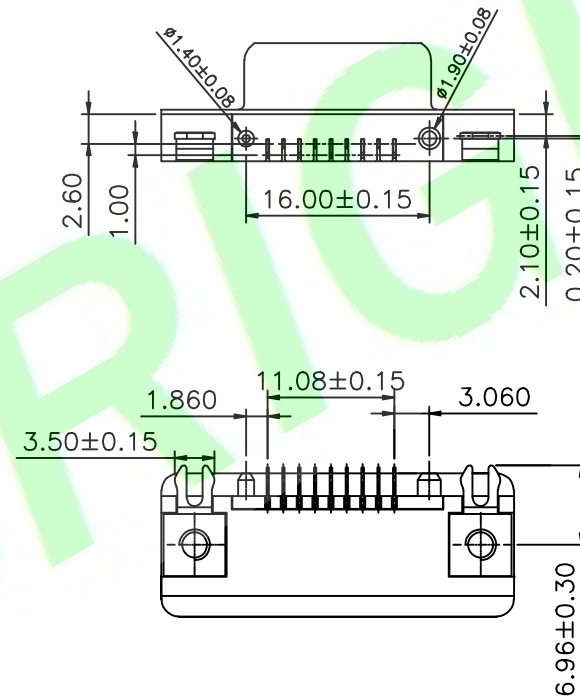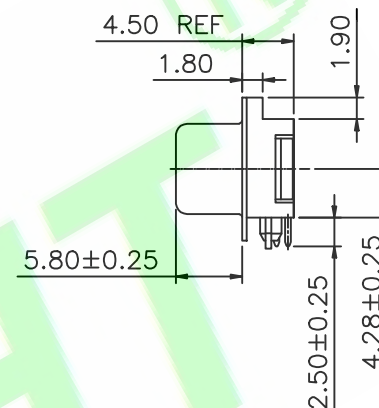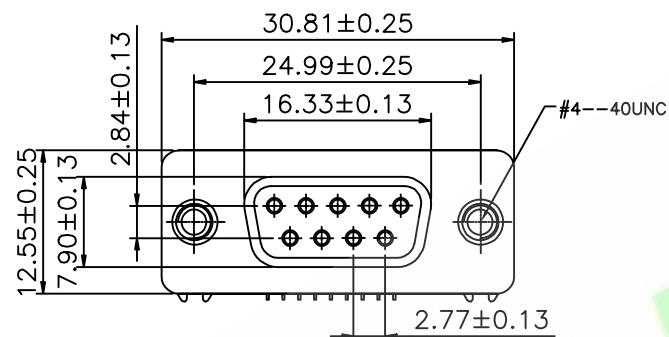

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : DB104R1-09FX-01-X
	LINEAR	ANGLES	
CHKD.: Judyyan	X.: ± 0.38	X': $\pm 2.0^{\circ}$	DWG. NO.:
	X.X: ± 0.35	X.X': $\pm 1.0^{\circ}$	
APPD.: Billy	X.XX: ± 0.25	X.XX': $\pm 0.5^{\circ}$	TITLE : SLIM-9M, Ultra-Thin Riveting R/A Type
	X.XXX: ± 0.15	X.XXX': $\pm 0.5^{\circ}$	
			DATE: 30-Dec-2020

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		