

Specifications:

Material And Finish:

Insulator:PBT Or High Thermoplastic UL 94V-0 Rated

Shell :Cold Roller steel;Tin Or over Nicke

Contact Material:Brass

Contact Finish:Selective Gold Finished

Jack Screws :Brass Material, Nickel Finish

With #4-40 Threaded Jack Screws

Rating:

Current Rating:3.0 Amps




Operating Temperature Range:-55~+105°C

Electrical:

Contact resistance:25 Milliohms MAX

Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

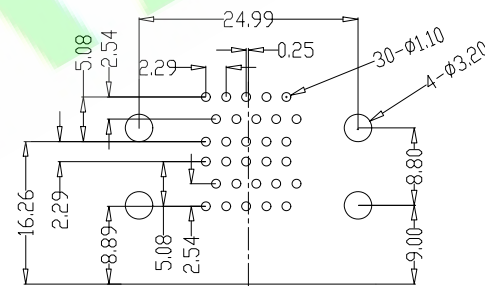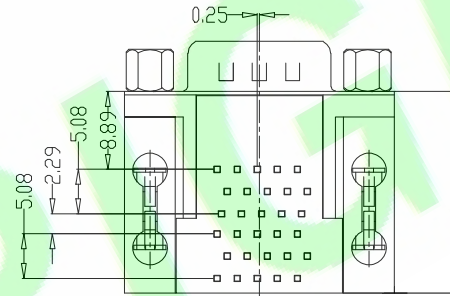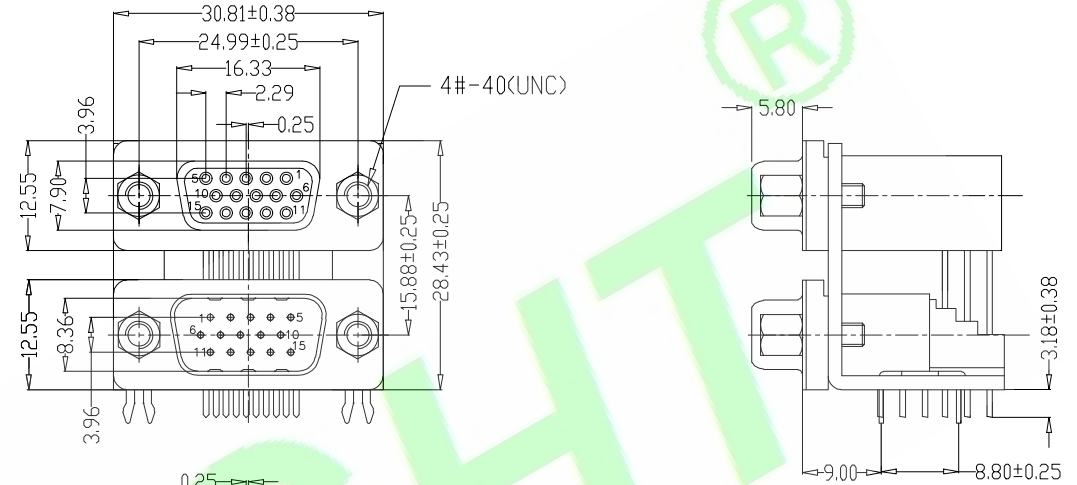

PCB Layout

Ordering Information


DB120R-XXFMX-01-BX
 1 2 3 4 5 6 7 8

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — F:Female 15PIN
- 5: — M:Male 15PIN
- 6: — H:Gold flash on contact;Matte Tin on tail
 A1:Gold flash on contact;Tin on tail
- 7: — B:Black
- 8: — B:In Tube
 C:In Tray

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : DB120R-XXFMX-01-BX	
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:	
	X.: ±0.38	X': ±2.0°	TITLE :	
APPD.: Billy	X.X: ±0.35	X.X': ±1.0°	D-SUB15F/15M Riveted and locked with screws 15.88mm	
	X.XX: ±0.25	X.XX': ±0.5°	DATE: 30-Dec-2020	
	X.XXX: ±0.15	X.XXX':		

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO.