

Specifications:**Material And Finish:**

Insulator:PBT+30%GF UL94V-0 Black color

Contact:Brass

Shell:Steel With Nickel Plated.

Plated:See Ordering Information

Rating:

Current Rating:5 Amp

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:25m Ohm Max






Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information
DB173R-XXFX-XX-XH

1 2 3 4 5 6 7

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — F:FeMale
5: — 5:Selective Gold Plated
A:Contact Gold flash
6: — 01:W/O Screw
02:With Screw
7: — A:In Bag
C:In Tray

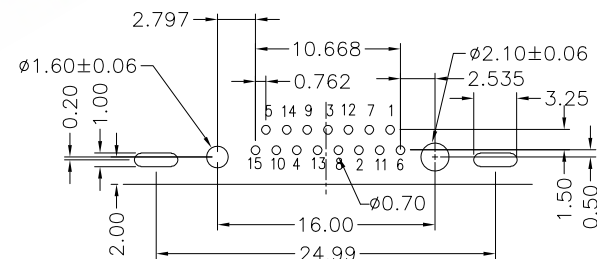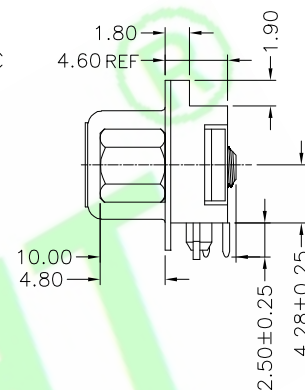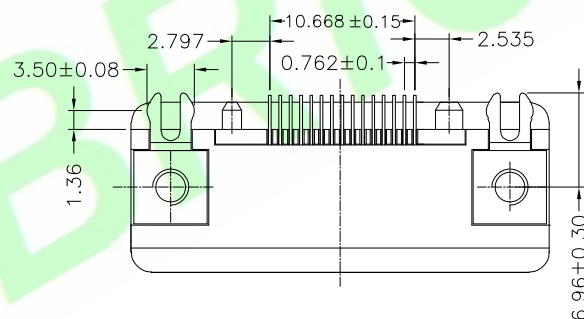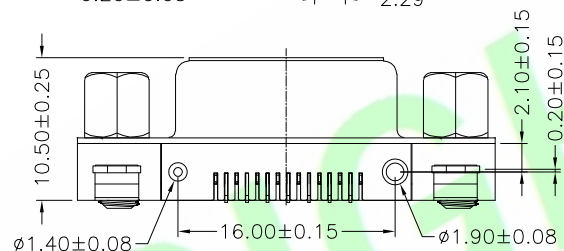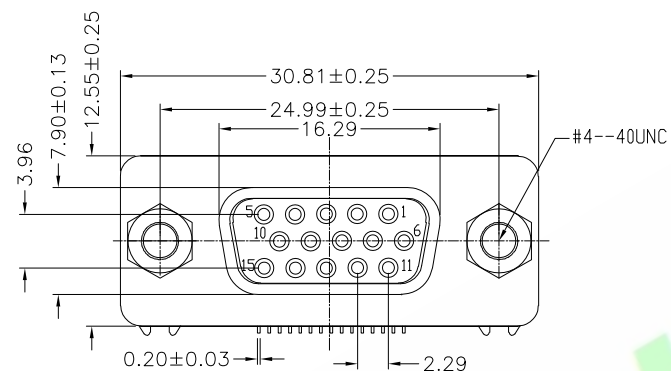

PCB LAYOUT

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : DB173R-XXFX-XX-XH		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Aaron	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.38	x*: ±5.0°	TITLE : Slim-15F 铆合型前八后七 锁螺丝				
2X				Pan mingquan	x.x: ±0.35	x.x*: ±3.0°					
1X	ORIGINAL	Aaron		APPD.:	x.xx: ±0.25	x.xx*: ±2.0°	DATE: 25-Mar-2020		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx*: ±1.0°			SCALE: 1:1		
							UNIT: mm	THIRD ANGLE PROJECTION			