

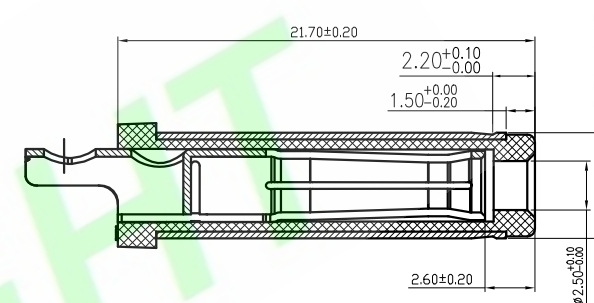
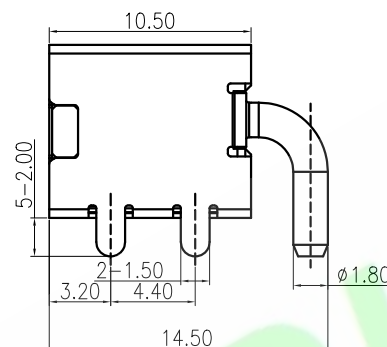
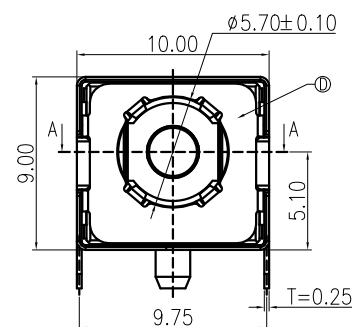
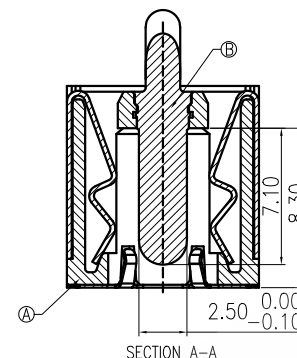






SPECIFICATION:

1. RATING: DC 30V 20A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

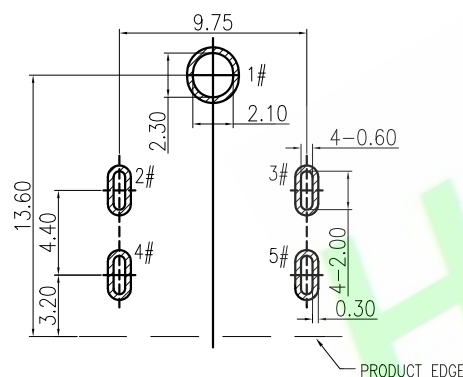

Recommended PCB Layout
(Tolerance: ± 0.05)



D	GROUND	SUS 304		1
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DR.BY.: XQR	GENERAL TOLERANCE:		PART NO : DC5525-1194-00	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ± 0.30	x': ± 5.0°	TITLE :	
	x.x: ± 0.20	x.x': ± 3.0°	5.5 立式 H=9 DCPOWER JACK	
APPD.: Billy	x.xx: ± 0.15	x.xx': ± 2.0°	DATE: 22-Jan-2025	
	x.xxx: ± 0.10	x.xxx': ± 1.0°		

HJBRIGHT® 東莞市華晶電子有限公司			A4
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
SHEET: 1/1	SCALE: 1:1		
UNIT: mm	THIRD ANGLE PROJECTION		

1X	ORIGINAL	XQR	
	DESCRIPTION	DR.BY	ECN. NO