




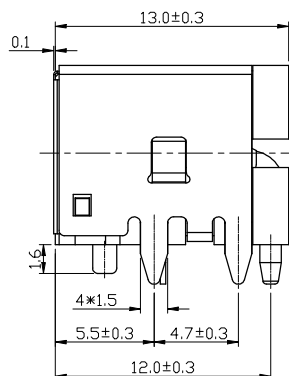


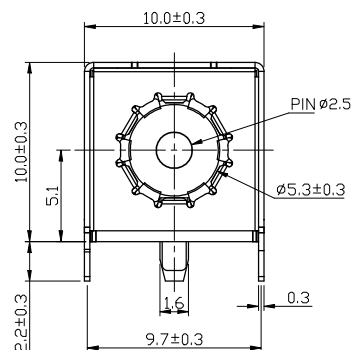

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)


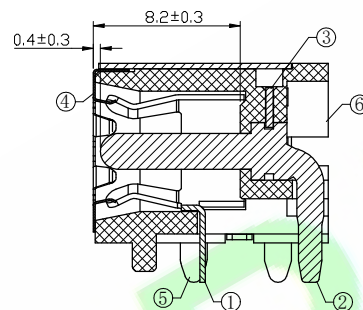


SCHEMATIC




SPECIFICATION

1. Rating:
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-30N;
6. life test: 5,000 cycles.

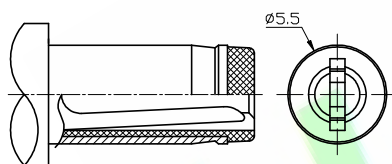

RECOMMENDED PLUG
Rating : DC 24V 10A

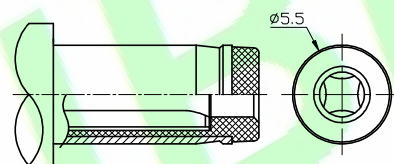

RECOMMENDED PLUG
Rating : DC 24V 15A

6	HOUSING	1	PA10T	
5	SHELL	1	BRASS/SPCC	Ni-Plating
4	COAT	1	SUS301	N/A
3	PEG	1	BRASS	N/A
2	PIN	1	ZINC ALLOY	Ni-Plating
1	SPRING PIECE	1	BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DR.BY.:

Judyyan

CHKD.:

Aren

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ± 0.30 X': $\pm 5.0^\circ$ X.X: ± 0.20 X.X': $\pm 3.0^\circ$ X.XX: ± 0.15 X.XX': $\pm 2.0^\circ$ X.XXX: ± 0.10 X.XXX': $\pm 1.0^\circ$

PART NO : DJ-D220-R-01

DWG. NO.:

TITLE :

DC JACK

DATE: 29-Sep-2021

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X
REV.

ORIGINAL

Judyyan

DR.BY

ECN. NO.

1

2

3

4

5

6

7

8