

RoHS Compliant

**Specifications:****Material And Finish:**

Insulator:PBT UL94V-0, Color:Red

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.5 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering InformationDP2541-14S-01-X-P
1 2 3 4

1:—Series No.

2:—No. of Positions


3:—S: Tin Plated

Ni:0.75~2um (30~80u'')


Tin:1~3um (40~120u'')

4:—B: In Tube

C: In Tray

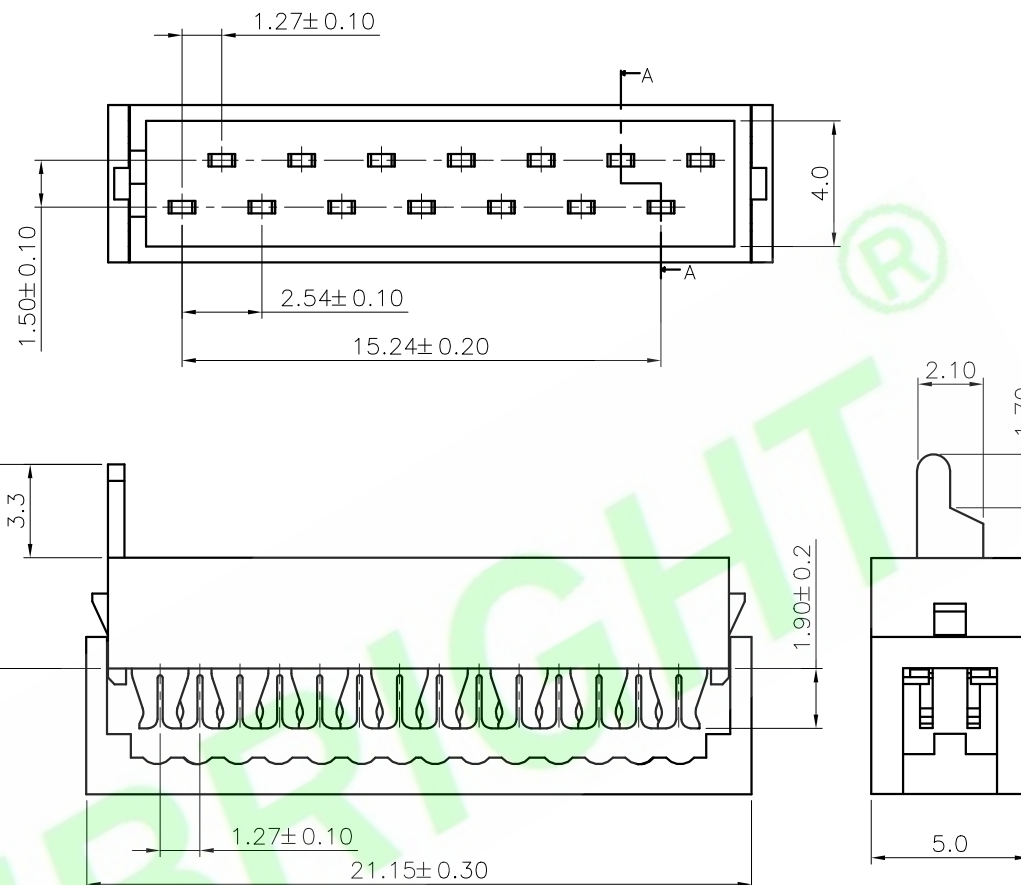

A-A: sectional view

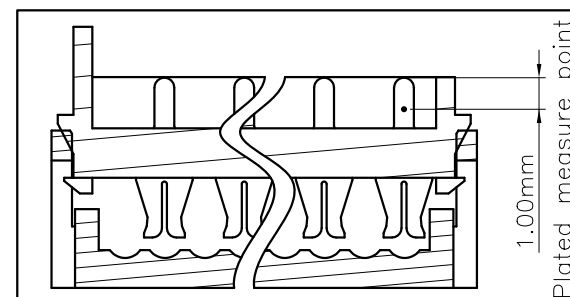

Plated measure point

1X	ORIGINAL	Xiao	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Xiao	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Juddyan	x.: ±0.30	x.x: ±5.0°
	x.xx: ±0.20	x.xx: ±3.0°
APPD.: Billy	x.xxx: ±0.10	x.xxx: ±2.0°
	x.xxx: ±0.10	x.xxx: ±1.0°

PART NO : DP2541-14S-01-X-P

DWG. NO.:

TITLE :

2.54mm Pitch IDC Plug Dip Type

DATE: 19-Jan-2025

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE:1:1

UNIT:mm



THIRD ANGLE PROJECTION

A4