

Specifications:

Material And Finish:

Insulator:High Temperature Plastic UL94V-0

Contact:Phosphor Bronze

Rating:

Current Rating:1.5 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max



Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

DP2541-XXX-01-X
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — A:Gold Flash
Q: Tin Plated
4: — B:In Tube
C:In Tray

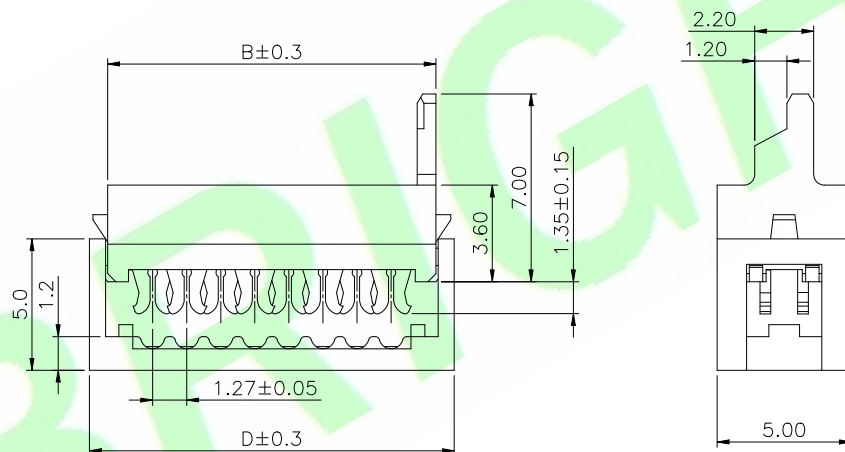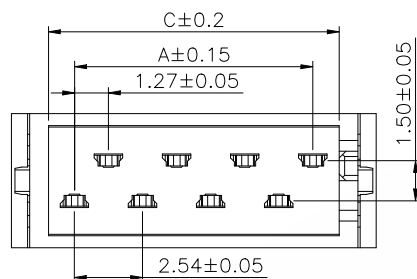

NO	DIM			
	A	B	C	D
04	3.81	7.11	5.91	8.51
06	6.35	9.65	8.45	11.05
08	8.89	12.19	10.99	13.59
10	11.43	14.73	13.53	16.13
12	13.97	17.27	16.07	18.67
14	16.51	19.81	18.61	21.21
16	19.05	22.35	21.15	23.75
18	21.59	24.89	23.69	26.29
20	24.13	27.43	26.23	28.83
22	26.67	29.97	28.77	31.37
24	29.21	32.51	31.31	33.91
26	31.75	35.05	33.85	36.45


5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : DP2541-XXX-01-X	
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0809-032	
3X	Update electrical performance specifications	Judyyan	20240319	CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch IDC Plug Dip Type	
2X	Modify Dim B and D	Samson		Tony	X.X: ±0.20	X.X': ±3.0°		
1X	ORIGINAL	joy chen		APPD.:	X.XX: ±0.15	X.XX': ±2.0°		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 13-Feb-2009	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE:1:1

UNIT:mm



THIRD ANGLE PROJECTION

A4