

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Copper Alloy

Rating:

Current Rating:30 Amp

Rated Voltage:600V

Operating Temperature Range:-40°~+105°C

Electrical:

Dielectric Voltage:3000V AC/Minute

Wire Range: #10~18AWG

Ordering Information

DZT10S-XXQ-01-C

1 2 3 4 5


1:—Series No.

2:—S:Straight Type

3:—No. of Positions

4:—Q:Tin Plated

5:—C:In Tray

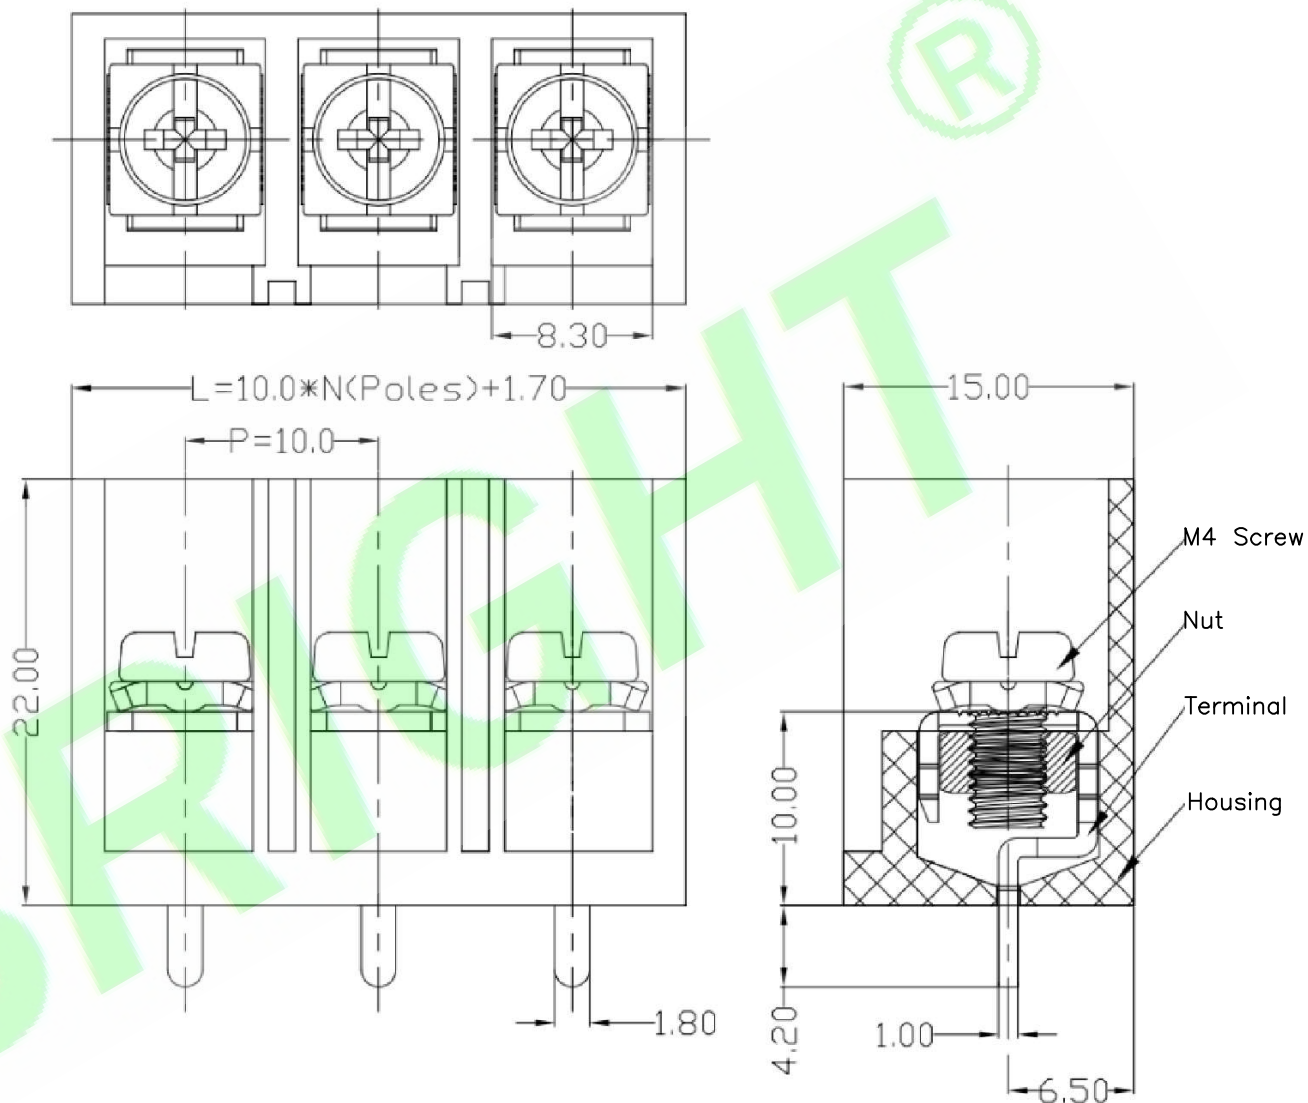

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : DZT10S-XXQ-01-C
	LINEAR	ANGLES	
CHKD.: Aren	$>120 \pm 1$	X: $\pm 5.0^\circ$	DWG. NO.:
	$30 \sim 120 \pm 0.60$	X.X: $\pm 3.0^\circ$	
APPD.: Billy	$6 \sim 30 \pm 0.40$	X.XX: $\pm 2.0^\circ$	TITLE : 10.0mm Pitch Barrier Terminal Block
	$0 \sim 6 \pm 0.30$	X.XXX: $\pm 1.0^\circ$	
DATE: 26-May-2024			

HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.